



JVC-19

19th Joint Vacuum Conference

29.9. – 4.10.2024. Podstrana, Croatia



Book of Abstracts

19th Joint Vacuum Conference

&

30th International Scientific Meeting on Vacuum Science and Technique



JVC-19
19th Joint Vacuum Conference

Published by

Croatian Vacuum Society

For the publisher

Nikša Krstulović

Organized by

Croatian Vacuum Society

Editors

Nikša Krstulović, Marko Karlušić

eBook of Abstracts

ISBN 978-953-98154-5-3

Zagreb, September 2024.

Copyright © Croatian Vacuum Society, Zagreb, Croatia



1. Preface	4
2. Committees	5
3. Sponsors	6
4. Program at a glance	8
5. Detailed program	9
6. Abstracts (in order of presentation)	18
Session 1	89
Session 2	22
Session 3	26
Session 4	30
Session 5	34
Session 6	38
Session 7	42
Session 8	46
Session 9	50
Session 10	54
Session 11	58
Poster session 1	61
Poster session 2	78



1. Preface

Dear Colleagues,

on behalf of the Croatian Vacuum Society, International Program and Organizing Committees, and the Local Organizing Committee we are pleased to welcome you to Podstrana from the 29th of September to the 4th of October 2024, to attend

19th Joint Vacuum Conference & 30th International Scientific Meeting on Vacuum Science and Technique.

The JVC-19 conference is the nineteenth edition of a series of successful biannual symposia organized in Middle-European countries by Vacuum Societies of Austria, Croatia, Czech Republic, Hungary, Slovakia, and Slovenia.

The conference participants present their recent scientific results and achievements in the following fields: surface science, vacuum science and technology, thin films and coatings, nanotechnology, plasma science and technology, electronic materials, surface engineering, and biointerfaces. The scientific program of the conference consisted of 4 plenary lectures, 13 invited lectures, 25 oral contributions, and 35 posters.

We hope that this joint conference will show advancements in the field of vacuum and related emerging technologies, reinforce existing networks of scientific interactions, and stimulate the development of new collaborations.

On behalf of the international program and organizing committees, we thank the plenary and invited speakers for accepting our invitation and all participants for their valuable contributions. The organizers would like to thank the Braavos agency for professional governance of all administrative matters, and the management and staff of the Hotel Le Méridien Lav, for their help in the smooth implementation of the meeting.

We are confident that your participation at the JVC-19 conference will enable further successful organization of JVC conferences and a fruitful and challenging experience for all of us.

Zagreb, September 2024.

We wish you all a pleasant stay in Podstrana!

With best regards,

Nikša Krstulović and Maja Mičetić

Chairs of JVC-19 and 30th ISMVST



2. Committees

Conference Chairman: Nikša Krstulović, Institute of Physics, Croatia

Vice Chairman: Alenka Vesel, Jožef Stefan Institute, Slovenia

Vice Chairman: Maja Mičetić, Rudjer Boskovic Institute, Croatia

The International Programme Committee

Vedran Đerek, University of Zagreb, Faculty of Physics, Croatia

Iva Šrut Rakić, Institute of Physics, Croatia

Christian Mitterer, Montanuniversität Leoben, Austria

Paul H. Mayrhofer, TU Wien, Austria

László Óvári, ELI-HU, Hungary

Attila Csík, HUN-REN Institute for Nuclear Research, Debrecen, Hungary

Miha Čekada, Jožef Stefan Institute, Slovenia

Janez Kovač, Jožef Stefan Institute, Slovenia

Karel Mašek, Charles University, Czech Republic

Jiří Čapek, University of West Bohemia, Czech Republic

Jozef Novák, Academy of Science, Bratislava, Slovak Republic

Štefan Luby, Academy of Science, Bratislava, Slovak Republic

The International Organising Committee

Mario Rakić, Institute of Physics, Croatia

Marko Karlušić, Rudjer Boskovic Institute, Croatia

Christoph Eisenmenger Sittner, TU Wien, Austria

Helmut Riedl, TU Wien, Austria

István Bársony, Centre for Energy Research, Budapest, Hungary

Béla Pécz, Centre for Energy Research, Budapest, Hungary

Ita Junkar, Jožef Stefan Institute, Slovenia

Gregor Primc, Jožef Stefan Institute, Slovenia

Stanislav Novák, J. E. Purkinje University in Usti nad Labem, Czech Republic

Vítězslav Straňák, University of South Bohemia, České Budějovice, Czech Republic

Ľuboš Šušlík, University of Žilina, Slovak Republic

Jaroslav Bruncko, SCSTI, Bratislava, Slovak Republic

The Local Organising Committee

Rafaela Radičić, Institute of Physics, Croatia

Karmen Kapustić, Institute of Physics, Croatia

Ida Delač, Institute of Physics, Croatia

Nikolina Novosel, Institute of Physics, Croatia

Lucija Krce, University of Split, Faculty of Science, Croatia



JVC-19

19th Joint Vacuum Conference

3. Sponsors

Premium sponsor



Platinum sponsors



LRM d.o.o.
Ljubljana / Slovenija

SPECSGROUP





JVC-19

19th Joint Vacuum Conference

Gold Sponsor



Silver Sponsors



Other Support



REPUBLIC OF CROATIA
Ministry of Science and
Education



Partners



Hiperweb



4. Program at a glance

	SUNDAY 29th Sept	MONDAY 30th Sept	TUESDAY 1st Oct	WEDNESDAY 2nd Oct	THURSDAY 3rd Oct	FRIDAY 4th Oct
8:45-9:00		Opening of JVC-19				
		Session 1	Session 4	Session 7	Session 9	
9:00-9:45		Ruzic	Óvári	Asensio	Driscoll	Meeting 1
9:45-10:15		Čada	Vašina	Tkadletz	Štrkalj	
10:15-10:35		Čekada	Gostenčnik	Zaplotnik	Šoltýs	Meeting 2
10:35-10:55		Novák	Dodony	Primc	Mašek	
10:55-11:30		Coffee break	Coffee break	Coffee break	Coffee break	
		Session 2	Session 5	Session 8	Session 10	
11:30-12:00		Csík	Noga	Panjan	Šetina Batič	Closing of JVC-19
12:00-12:20		Drobnič	Százaz	Recek	Kutassi	
12:20-12:40		Hajagos-Nagy	Majkić	Kurtishaj Hamzaj	Roy	
12:40-13:00		Novosel	scia systems	Ukropcová	Zver	
13:00-15:00		Lunch	Lunch	Lunch	Lunch	
		Session 3	Session 6		Session 11	
15:00-15:30		Siffalovic	Paramon	Excursion/City tour Split sightseeing & Conference dinner at konoba Rudine	Skoko	
15:30-15:50		Kousal	Čurda		Janů	
15:50-16:10		Đerek	Omerzu		Delač	
16:10-16:40		Hahn	Kun		Final remarks & coffee break	
16:40-17:10		Coffee break	Coffee break			
17:10-19:00	Registration	Poster session	Poster session			
19:00-22:00	Welcome drink & welcome dinner	Dinner	Dinner		Dinner	
	Legend:	Plenary	Invited	Oral	Sponsor	JVC-19 19 th Joint Vacuum Conference



5. Program

Sunday, 29th Sept

17:00	Registration
19:00	Welcome drink & welcome dinner

Monday, 30th Sept

8:45	Opening of JVC-19
Session 1	
9:00	David N. Ruzic, Illinois Plasma Institute, USA <i>Controlling the Energy and Species in PVD: HiPIMS with Cathode Reversal, Plenary</i>
9:45	Martin Čada, Czech Republic <i>HiPIMS with controlled arc ignition: hybrid plasma deposition technique for hard coatings, Invited</i>
10:15	Miha Čekada, Slovenia <i>Property variation of hard coatings deposited in industrial deposition systems, Oral</i>
10:35	Jozef Novák, Slovakia <i>Focused Ion Beam technology as an excellent tool for integration of the three dimensional GaP nanocone onto Single Mode Optical Fibre, Oral</i>
10:55	Coffee break
Session 2	
11:30	Attila Csík, Hungary <i>Surface coating layers for sensors and biomedical applications, Invited</i>
12:00	Matej Drobnič, Slovenia <i>Effect of LCO₂ on TiAlN hard coating wear behavior at elevated temperatures, Oral</i>
12:20	Klára Hajagos-Nagy, Hungary <i>Non-equilibrium solubility of Cu in α-Mn structure – microstructure and growth of α-Mn(Cu) films, Oral</i>
12:40	Nikolina Novosel, Croatia <i>Complex magnetic and transport phenomena in nanocrystalline gadolinium doped manganite CaMnO₃, Oral</i>



13:00	Lunch break
Session 3	
15:00	Peter Siffalovic , Slovakia <i>In-Situ Techniques for Perovskite Layer Growth Monitoring: X-ray Scattering and Photoluminescence, Invited</i>
15:30	Jaroslav Kousal , Czech Republic <i>Plasma-Assisted Vapour Thermal Deposition for Controlled Deposition of Nanocomposites, Oral</i>
15:50	Vedran Đerek , Croatia <i>Optically driven thin film OECT electrochemical sensor, Oral</i>
16:10	Rainer Hahn , Austria <i>title: Assessing and enhancing fracture toughness of hexagonal diboride coatings, Invited</i>
16:40	Coffee break
17:10	Poster session 1
19:00	Dinner

Tuesday, 1st Oct

Session 4	
9:00	László Óvári , University Szeged & Extreme Light Infrastructure ALPS, Hungary <i>2D Boron Carbon Nitride structures: from synthesis to application, Plenary</i>
9:45	Petr Vašina , Czech Republic <i>Me-B-C coatings - hard and fracture resistant material, Invited</i>
10:15	Žan Gostenčnik , Slovenia <i>Refractory high-entropy nitride coatings deposited by reactive direct current magnetron sputtering, Oral</i>
10:35	Erzsébet Dodony , Hungary <i>EDIC intensity correction of electron diffraction, Oral</i>
10:55	Coffee break

**Session 5**

11:30	Pavol Noga , Slovakia <i>Ion beams for high fluence irradiation testing and characterization of materials, Invited</i>
12:00	Zoltán Száraz , Slovakia <i>Ion beam irradiation and analysis of materials for radiation environments, Oral</i>
12:20	Milena D. Majkić , Serbia <i>Mechanism of nanostructure formation on metal surface by an impact of slow highly charged ions under arbitrary angle of incidence, Oral</i>
12:40	Andrea Schulze , Germany <i>Enhancing Magnetic Sensing & Next-Gen AR Devices - Superior Performance with Ion Beam Processing (scia systems – sponsor presentation)</i>
13:00	Lunch

Session 6

15:00	Jordi Sancho Paramon , Croatia <i>Semi-continuous metal films as building blocks for optical coating, Invited</i>
15:30	Pavel Čurda , Czech Republic <i>ITO nanostructures for label free electro-optical modulated LMR sensing, Oral</i>
15:50	Aleš Omerzu , Croatia <i>Thin ZnO films prepared by plasma-enhanced atomic layer deposition for enhanced photocatalytic applications, Oral</i>
16:10	Róbert Kun , Hungary <i>Nanomechanical characterization of solid-state Li-ion battery components, Invited</i>
16:40	Coffee break
17:10	Poster session 2
19:00	Dinner

**Session 7**

9:00	María C. Asensio , Materials Science Institute of Madrid, Spain <i>Discovery of advanced materials using artificial intelligence methods and advanced characterization techniques, Plenary</i>
9:45	Michael Tkadletz , Austria <i>Microstructural Design of Cathodic Arc Deposited fcc-TiAlN Coatings: A Path Toward Sustainable Hard Coatings, Invited</i>
10:15	Rok Zaplotnik , Slovenia <i>Novel plasma-supercavitation technology for water cleaning, Oral</i>
10:35	Gregor Primc , Slovenia <i>Combination of advanced oxidation technologies for removal of micropollutants, Oral</i>
10:55	Coffee break

Session 8

11:30	Matjaž Panjan , Slovenia <i>Unraveling plasma self-organization of magnetron sputtering discharges, Invited</i>
12:00	Nina Recek , Slovenia <i>Upscaling the plasma reactor for the treatment of seeds and seed-borne toxins in agriculture use, Oral</i>
12:20	Ardita Kurtishaj Hamzaj , Slovenia <i>Hydrogen interaction and oxide permeation barrier formation in B2-ordered Fe-Al intermetallic alloy, Oral</i>
12:40	Iveta Ukropcová , Czech Republic <i>3D Printing of Semiconductors using Electron Tweezers, Oral</i>
13:00	Lunch
15:00	Excursion / City tour - Split sightseeing & Conference dinner at konoba Rudine

**Session 9**

9:00	Judith L. Driscoll , University of Cambridge, United Kingdom <i>Challenges and Solutions of Oxides for Future AI Hardware, Plenary</i>
9:45	Nives Štrkalj , Croatia <i>Nanoscale Ferroelectricity and Electrochemical Dynamics in Hafnia-Based Films, Invited</i>
10:15	Ján Šoltýs , Slovakia <i>Fabrication of NbTiN superconducting nanowire single-photon detector, Oral</i>
10:35	Karel Mašek , Czech Republic <i>Structure and growth of cobalt oxide epitaxial layers, Oral</i>
10:55	Coffee break

Session 10

11:30	Barbara Šetina Batič , Slovenia <i>Microbiologically induced corrosion of power plant steel components, Invited</i>
12:00	Kinga Kutasi , Hungary <i>Alginate-stabilized colloidal ZnO NPs for biomedical applications, Oral</i>
12:20	Nepal C. Roy , Belgium <i>Atmospheric plasmas for depositing sulfonated plasma-polymerized films for use in liquid contacts, Oral</i>
12:40	Mark Zver , Slovenia <i>Plasma-generated vacuum-UV radiation for inactivation of viruses in water, Oral</i>
13:00	Lunch

**Session 11**

15:00	Željko Skoko , Croatia <i>Revealing nanoscale mechanism in the jumping crystals, Invited</i>
15:30	Lucie Janů , Czech Republic Radical-assisted covalent binding of biomolecules to amine plasma polymers, Oral
15:50	Ida Delač , Croatia <i>Exploring the effects and stability of organic molecule modifications on CVD-synthesized monolayer MoS₂, Oral</i>
16:10	Closing remarks
16:20	Coffee break
19:00	Dinner



Poster session 1

P1	Changhwan Choi , Korea <i>ALD HfZrOx and InGaOx Thin Films for Flash Memory Application</i>
P2	Robert Peter , Croatia <i>Photocatalytic activity of TiO2 thin films embedded with Cu nanoparticles prepared by atomic layer deposition technique</i>
P3	Aljaž Drnovšek , Slovenia <i>High-Temperature Tribology of Multilayered CrN/(Cr,V)N/VN Protective Coatings</i>
P4	Vedran Brusar , Croatia <i>Pressure dependent nonlinear spectral broadening of ultrashort laser pulses in hollow-core fiber (HCF)</i>
P5	Iva Šrut Rakić , Croatia <i>Monolayer MoS2 growth on a pre-patterned substrate as a way to induce strain</i>
P6	Andrea Jurov , Slovenia <i>Characterization of Alumina Scales on Fe-Al Alloys: Enhancing High-Temperature Hydrogen Permeability Resistance</i>
P7	Davor Čapeta , Croatia <i>High resolution, compact Raman spectrometer based on CMOS camera</i>
P8	Julio Car , Croatia <i>Determination of dielectric functions of colloidal silver nanoparticles in LSPR relevant wavelength range</i>
P9	Filip Ferenčík , Slovakia <i>Effect of Sputtering Power on Low Concentration Impurities in Binary Oxides for Semiconductor Applications: A ToF-ERDA Characterization Study</i>
P10	Iva Šarić Janković , Croatia <i>Low-energy ion bombardment induced reduction of TiO2 grown by Atomic Layer Deposition</i>
P11	Karmen Kapustić , Croatia <i>Visualizing intercalation of 2D material using AFM based techniques: MoS2 on graphene/Ir(111) case study</i>
P12	Nikša Krstulović , Croatia <i>UV and solar-driven photocatalysis of organic dyes using ZnO-Ag heterojunction nanoparticles synthesized by one-step laser synthesis in water</i>
P13	Karolina Pietrzak , Croatia <i>Application of electrochemical impedance spectroscopy in studying the mechanism of metal oxide nanoparticles used in ion-selective electrodes</i>
P14	Šárka Zuzjaková , Czech Republic <i>High entropy nitrides: High temperature study of Cr-Hf-Mo-Ta-W-N thin films</i>



P15	Zsolt Fogarassy , Hungary <i>Structural investigation of the heat-treated Ti/Al/TiN/Au contact layer on n-GaN - role of TiN</i>
P16	Miklós Serényi , Hungary <i>On the challenges in reactive HiPIMS co-sputtering of Y and Ti for oxide layers</i>
P17	Béla Pécz , Hungary <i>Advanced structural characterization of Gallium Oxide by transmission electron microscopy</i>

Tuesday 1st Oct

17:10-19:00

Poster session 2

P1	Lucija Krce , Croatia <i>PET surfaces treated with atmospheric pressure plasma jet and enhanced with ZnO nanoparticles: characterization and antibacterial activity</i>
P2	Damir Dominko , Croatia <i>Collective states driven far away from the equilibrium</i>
P3	Miran Mozetič , Slovenia <i>Characterization of low-pressure gaseous plasmas by optical emission spectroscopy</i>
P4	Maja Mičetić , Croatia <i>Synthesis and properties of Ge-based core-shell quantum structures</i>
P5	Mario Rakić , Croatia <i>Femtosecond engraving computer-generated holograms</i>
P6	Rafaela Radičić , Croatia <i>Fabricating PET/ZnO composite assisted by RF plasma processing</i>
P7	Tihomir Car , Croatia <i>Silver nanoparticles in SiC matrix</i>
P8	Zsolt Fogarassy , Hungary <i>Technological applicability of VO₂ layers prepared with different approaches</i>
P9	Krešimir Salamon , Croatia <i>Grazing incidence high-energy heavy ion irradiation for surface nanopatterning</i>
P10	Tímea Hegedűs , Hungary <i>Pt nanoparticles on inert h-BN support: investigation of the CO₂ hydrogenation mechanism on the surface level</i>
P11	Ildiko Cora , Hungary <i>In situ TEM examination of the monoclinic VO₂ thin layer phase transformation to tetragonal VO₂</i>



P12	Dimo Yosifov , Canada <i>Python Modeling of Beamline Vacuum System</i>
P13	Klára Hajagos-Nagy , Hungary <i>The effect of impurities on the structure and mechanical properties of CoCrCuFeNi alloy films</i>
P14	Pranjali Jadhao , Czech Republic <i>Direct growth and application of 2D single crystals of MXenes</i>
P15	Ivna Kavre Piltaver , Croatia <i>Enhanced Photocatalytic Activity of ZnO Films with Fe₂O₃ Intermediate Layers for Efficient Water Purification</i>
P16	Alenka Vesel , Slovenia <i>Influence of chitosan-coated urinary catheters on adhesion of urethral cells</i>
P17	Martin Vičar , Czech Republic <i>New stable ionization vacuum gauge as the transfer standard</i>
P18	Marcell Gajdics , Hungary <i>GaON thin films prepared by reactive sputtering of a liquid Ga target</i>



Session 1

Plenary

Controlling the Energy and Species in PVD: HiPIMS with Cathode Reversal

David N. Ruzic, Zachary Jeckell, Nicholas Connolly, Tag Choi, Dongho Lee, Dren Qerimi

Center for Plasma Materials Interactions, Department of Nuclear, Plasma and Radiological Engineering, University of Illinois at Urbana-Champaign, Urbana IL USA

email: druzic@illinois.edu

High Power Impulse Magnetron Sputtering (HiPIMS) has been proven as an ionized physical vapor deposition (iPVD) technique to provide superior film quality and adhesion. The ionization of the target material is done without the use of additional plasma generators through high power densities at the target surface, ultimately increasing the ion flux to the substrate. The incident ions allow for controlled ion bombardment energy leading to superior quality films over that of direct current magnetron sputtering (DCMS). One limiting factor of implementation of HiPIMS in industrial settings is the decreased deposition rates as compared to conventional DCMS. The reduction in deposition rate is believed to be mainly due to the return of ionized target material back to the target surface. The Center for Plasma Material Interactions has developed along with Starfire Industries LLC, a new HiPIMS power supply module which is capable of controlled cathode voltage reversal. The bipolar supply allows for control, both potential and timing, of a positive polarity pulse following the negative polarity main pulse. Timed control of the substrate bias with respect to the HiPIMS pulse, has been proven to provide control of film growth morphology, increase deposition rate and reduce film stress. Most importantly the energy of the ions reaching the substrate can be precisely controlled, even for insulating substrates. This work investigates the use of a controlled positive polarity pulse and increased ionization regions to increase deposition rate while controlling ion bombardment energy without an external substrate bias, retaining the superior film qualities expected from HiPIMS. Time resolved electron energy distribution functions and time-resolved ion energies at the substrate are shown for each species. Furthermore an etching regime is explored where it is possible to etch surface impurities off the substrate milliseconds before desposition all in the same device. By manipulating the pulse conditions, the ratio of target ions to gas ions can also be controlled.

Invited

HiPIMS with controlled arc ignition: hybrid plasma deposition technique for hard coatings

Martin Čada¹, Iryna Naiko¹, Alina Ostapenko¹, Ivana Venkrbcová¹, Zdeněk Hubička¹, Pavel Mareš², Jiří Vyskočil²

¹ *Institute of Physics of the Czech Academy of Sciences, Na Slovance 2, 182 00 Prague, Czechia*

² *HVM PLASMA Ltd., Na Hutmance 2, 158 00 Prague, Czechia*

email: cada@fzu.cz

Diamond-like carbon (DLC) thin films are in demand in modern industry as a hard coating for machining knives, drilling or pressing tools. Since DLC films are characterized by low friction they can be effectively applied on surfaces suffering from wear e.g. in combustion motors. Tetrahedral amorphous carbon (ta-C) prepared by cathodic arc physical vapor deposition (PVD) method from pure carbon target is promising candidate characterized by hardness higher than 60 GPa, high deposition rate but with surface roughness around 1 μm requiring a subsequent polishing of deposited thin films. Recently, one has been demonstrated that High Power Impulse Magnetron Sputtering (HiPIMS) operated in a mixed sputtering/cathode arc mode can produce ta-C films with a sp³ bond content of 80% [1]. To control the regularity, duration and timing of the cathode arc during the HiPIMS pulse, the secondary high-voltage negative pulse with defined phase shift was applied on the cathode [2]. For better understanding of this hybrid HiPIMS deposition process, the time-resolved ion composition and ion flux on substrate was investigated using energy-resolved mass spectrometer and Sobolewski probe. Four different plasma regimes were identified in dependence on the high-voltage pulse delay from start of HiPIMS pulse: 1) pure HiPIMS with IEDFs demonstrating presence of population of C⁺⁺ ions for a significantly longer time, 2) activated HiPIMS, 3) hyper HiPIMS and 4) HiC ARC. The total ion flux on the substrate proved that cathodic arc ignition increases the ion flux on the substrate by factor 2 in comparison with HiPIMS without arc ignition. The obtained results also showed that controlled ignition of the cathodic arc near the end of the HiPIMS pulse generates short-living argon and carbon ion fluxes whilst randomly ignited cathodic arc produces ion population bombarding a substrate for more than 100 μs .

[1] R. Ganesan et al. J. Phys. D: Appl. Phys. 48 (2015) 442001

[2] J. Vyskočil et al. Surf. Coat Technol. 446 (2022) 128765

Oral

Property variation of hard coatings deposited in industrial deposition systems

Miha Čekada¹, Aljaž Drnovšek¹, Matej Drobnič¹

¹ *Jožef Stefan Institute, Jamova 39, 1000 Ljubljana, Slovenia*

email: miha.cekada@ijs.si

In a lab-scale PVD system, the relationship between deposition parameters and coating properties is relatively straight-forward. In an industrial deposition system, on the other hand, there are several additional points which need to be considered. This includes possible gradients in vertical and radial axes, rotation mode dependence and shading effects. Though the deposition system producer guarantees the required coating quality within the specified chamber volume, these (relatively minor) variations can have an impact in specific tooling applications.

In this work we used both standard samples (polished disks) as well as simple cutting tools (drills) to evaluate the above mentioned dependences. We mounted these samples/tools at different rotation modes within the same batch, or at different heights in the chamber. While some batches were purpose-designed for this work, many were standard batches containing tools from our partners; this ensured the relevance of the results in a real industrial environment. We evaluated the coating thickness, the surface topography and the growth defect density in all these cases. The majority of work was conducted using cathodic arc evaporation, while for reference, magnetron sputtering was used too.

Unsurprisingly, the mounting rotation mode yielded the most expressed differences between the samples. However, a non-negligible gradient in roughness was found in the vertical direction. Finally, selected effects on reground tools will be shown where a consecutive sputtering of several coatings severely increases both the thickness and the roughness, which can severely deteriorate the tribological properties of the surface.

Oral

Focused Ion Beam technology as an excellent tool for integration of the three dimensional GaP nanocone onto Single Mode Optical Fibre

J. Novák¹, A. Rosová¹, S. Hasenöhrl¹, M. Sojková¹, J. Kováč² jr., J. Kováč²,
I. Lettrichová³, D. Pudiš³

¹ Institute of Electrical Engineering SAS, Dúbravská 9, 841 04 Bratislava, Slovakia

² Slovak University of Technology, Institute of Microelectronics and Photonics, 812 19 Bratislava, Slovakia

³ Department of Physics, University of Žilina, Univerzitná 1, 01026 Žilina, Slovakia
email: eleknova@savba.sk

Fiber-optic nanosensors (OFN) with nanoscale dimensions are capable of sensing intracellular/ inter-cellular physiological and biological parameters in submicron environments. Basically, there are three main groups of configurations in which all the different types of optical fibers can be exploited as biosensors: through direct excitation of their end face, through the exposition of their core on their longitudinal dimension or through the resonant coupling of internal gratings.

Focused ion beam (FIB) method was applied for separation of individual NCs from the sample. The typical device shape is square-like with side size close to 50 μm with NC in the middle. To prevent contamination of nanocone surface by aggressive waste produced during the cutting process, it is necessary make such cutting far from the nanocone: To our best experience such sufficient safety distance is higher than 10 micrometers. Crucial point of this experiment is backside thinning and polishing of GaP substrate under final thickness of 15 micrometers. Nanocone chip was after separation from the substrate transported to the front facet of the single-mode optical fiber (SMOF). This operation has to be realized extremely carefully. The front facet of the fiber is charged by electrons and scanned image is partially deformed. In this case the exact navigation of chip (or exact navigation of nanocone) on the precise position is hindered. Chip after landing on the fiber core is bonded to the fiber facet by platinum. Finally, the GaP nanocone was illuminated through the optical fiber and its optical picture was studied by near field scanning optical microscope (NSOM). We used a non-contact mode of NSOM technique where the tapered fiber tip is performing the in-plane movement over the sample without touching the sample surface. In summary, we studied preparation and properties of nanocone probes consisted from GaP nanocone integrated on central part of single mode fiber.

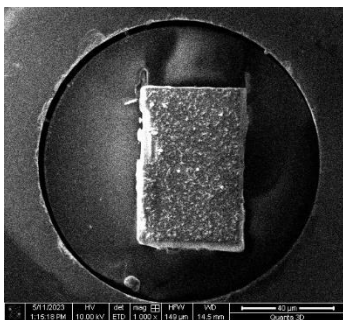


Fig.1 SEM top view on GaP nanocone chip onto top of SMOF (ion view)

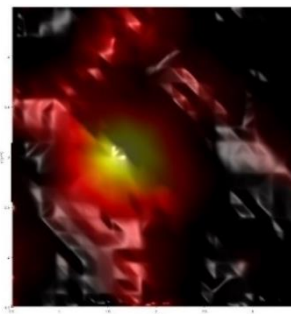


Fig.2 NSOM view on GaP nanocone deposited on SMOF – top view. Illumination is connected from the bottom side through the SMOF



Invited

Surface coating layers for sensors and biomedical applications

Attila Csik¹, Mátyás Hunyadi¹, Csaba Buga¹, Shinn-Jyh Ding², Gergely Ferenc Samu³, Csaba Hegedűs⁴,

Kálmán Vad¹

¹ HUN-REN Institute for Nuclear Research, Debrecen, H-4026 Hungary

² Institute of Oral Science, Chung Shan Medical University, Taichung City 402, Taiwan


³ Department of Physical Chemistry and Materials Science, University of Szeged, Szeged, H-6720 Hungary

⁴ Department of Biomaterials and Prosthetic Dentistry, Faculty of Dentistry, University of Debrecen, Debrecen, H-4032 Hungary

email: csik.attila@atomki.hu

By taking advantage of the opportunities provided by thin layers with the right thickness, composition and structure, we can reduce the size of the technological devices around us (e.g. sensors, portable computers, mobile phones). Thin layers can also be grouped in terms of their functionality. There can be layers providing chemical/physical protection on the surface of devices, such as diffusion barriers, layers that increase biocompatibility, and active layers that provide some physical response to external influences in sensors or light-emitting devices.

In this work, we report on the study of surface layers of dental implants that increase biocompatibility, and of a luminescent perovskite thin layer which is suitable for detecting radioactivity. First, the basis of the layer covering the surface of implants is a CaSi-ceramic powder. Using this powder, we investigated the possibilities of forming nanostructured coating layers on titanium substrates in order to significantly reduce the ossification time of the implants after implantation [1]. Secondly, the chemical synthesis of inorganic perovskite nanocrystals and the constructions of thin layers from them were performed. The subsequent irradiation of the thin layers was carried out with radiation sources and a particle accelerator beam. The aim of our work was to collect data on the potential applications of perovskite thin films as particle detectors, which are currently not available in the literature [2].

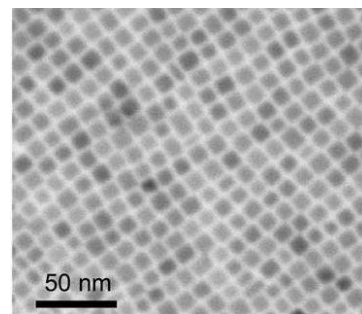

Scanning Transmission Electron Microscope (STEM) image from the prepared CsPbBr₃ nanocrystals.

Acknowledgements: This work was carried out in the frame of the projects TKP2021-NKTA-42 and 2019-2.1.7 ERANET-2021-00021 financed by the National Research, Development and Innovation Fund of the Ministry for Innovation and Technology, Hungary.

[1] Cs. Buga et al.: Colloids and Surfaces B: Biointerfaces 202 (2021) 111699.

[2] M. Hunyadi et al.: Advanced Functional Materials 32/48 (2022) 2206645.

Oral**Effect of LCO₂ on TiAlN hard coating wear behavior at elevated temperatures**

Matej Drobnič^{1,2}, Miha Čekada¹, Aljaž Drnovšek¹, Franci Pušavec²

¹ *Jožef Stefan Institute, Jamova 39, 1000 Ljubljana, Slovenia*

² *University of Ljubljana, Faculty of Mechanical Engineering, Aškerčeva 6, 1000 Ljubljana, Slovenia*

email: matej.drobnic@ijs.si

PVD hard coatings are widely used to improve the wear and friction properties of cutting tools. These coatings significantly extend the tool life, thereby reducing total machining time and lowering production costs. Wear has a key impact on tool life and can be reduced by using cooling and lubrication technologies. Conventional polluting cooling fluids such as oil or emulsion can be replaced using a novel lubricating liquid carbon dioxide (LCO₂) approach. This method not only promotes a cleaner machining process but also enhances productivity.

To simulate the conditions of use of a TiAlN-coated cutting tool with the addition of LCO₂, the friction and wear behavior were studied in a laboratory-scale experiment using a high-temperature ball-on-disc tribometer. We used a TiAlN-coated disc, deposited by the cathodic arc evaporation and an uncoated ball, both made of WC-Co. The tests were performed in air, N₂ and CO₂ atmospheres at room temperature, 200 °C, 500 °C and 700 °C. Subsequently, at the same temperature conditions, we also performed experiments with direct addition of LCO₂ to the contact zone in a CO₂ atmosphere. Wear analysis on ball and disk were performed using a confocal optical microscope and a profilometer, detailed characterization of the wear was obtained using SEM and FIB analyses.

Research results show that the TiAlN coating has the highest wear rate at room temperature conditions, regardless of the atmosphere, with the wear rate decreasing with temperature. The optimal temperature for the TiAlN coating in our case was around 500 °C in all atmospheres. However, when LCO₂ was introduced into contact, wear was the highest at this temperature. In all LCO₂ tribological tests, we also observe increased friction coefficient fluctuations, which may originate from the formation of dry ice particles at the nozzle outlet and non-uniform flow of LCO₂.

Oral

Non-equilibrium solubility of Cu in α -Mn structure – microstructure and growth of α -Mn(Cu) films


Hajagos-Nagy, Klára; Czigány, Zsolt; Misják, Fanni; Radnóczy, György

HUN-REN Centre for Energy Research, Konkoly-Thege Miklós út 29-33., Budapest 1121, Hungary

email: nagy.klara@ek.hun-ren.hu

The stable form of Mn at room temperature, α -Mn, is considered problematic due to its brittleness, even though the α -Mn structure contains many possibilities of use, such as para-, antiferro- and weakly ferromagnetic behaviour, anomalous Hall effect and high pressure (220 GPa) stability. The usability of α -Mn can presumably be expanded by alloying. Cu does not dissolve in it under equilibrium conditions, however, in our previous work we produced an α -Mn(Cu) solid solution under non-equilibrium conditions - by DC magnetron sputtering. In this research, we investigated the non-equilibrium solubility limit of Cu in α -Mn, the growth and microstructure of α -Mn(Cu) layers.

The non-equilibrium solubility was investigated on a 50 nm thick combinatorial sample grown by DC magnetron sputtering, where the composition varied linearly between pure Mn and 50 at% Cu content. Electron diffraction patterns showed that α -Mn can dissolve up to 30 at% Cu. Film growth was examined on 0.5-1 μ m thick films, comparing discrete and variable composition (gradient) layers. At 10 at% Cu content a single-phase α -Mn(Cu) solid solution layer grows with a columnar structure (fig. a). As the Cu content increases, an amorphous minority phase appears and hinders the growth of the α -Mn(Cu) grains (fig. b). Examination of gradient films showed that the columnar structure - characteristic of single-phase growth - can be maintained until the crystalline phase ceases (fig. c), which is favourable for many applications.

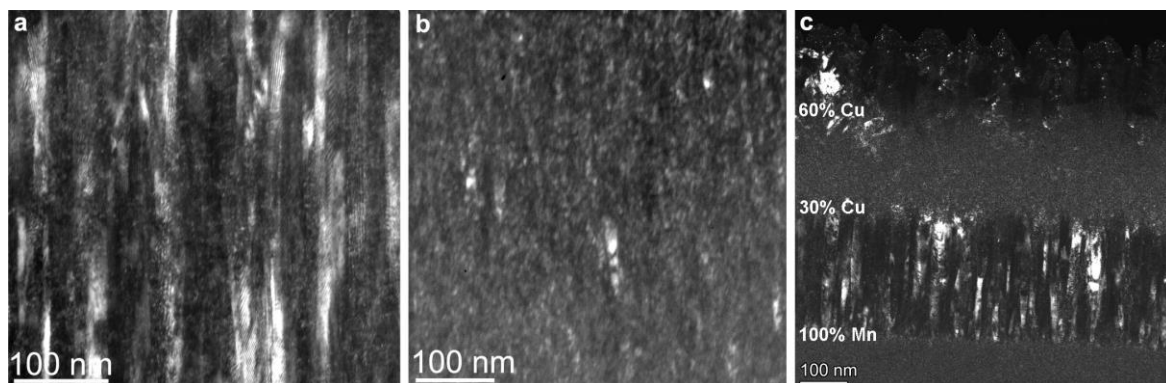

Microstructure of Mn-Cu films with Cu content of 10 at% (a), 20 at% (b) and 0-60 at% (c) on dark field TEM images.

This work is supported by the project VEKOP-2.3.3-15-2016-00002 of the European Structural and Investment Funds and the Hungarian Academy of Sciences, grant number K143216.

Oral**Complex magnetic and transport phenomena in nanocrystalline gadolinium doped manganite CaMnO_3**

Nikolina Novosel¹, Matija Čulo¹, Tomislav Ivek¹, Mirta Herak¹, Maria Čebela², Milena Rosić²

¹*Institut za fiziku, Bijenička cesta 46, 10000 Zagreb, Croatia*

²*Materials Science Laboratory, Institute of Nuclear Sciences, Vinča, University of Belgrade, P.O. Box 522, 11001 Belgrade, Serbia*

email: nnovosel@ifs.hr

Manganese oxides or manganites are widely known for their colossal magnetoresistance (CMR) effect. CMR is a metal-insulator transition caused by a magnetic field at the temperature close to the Curie point, and characterized by a drop of the resistivity by many orders of magnitude. Besides tuneable conductivity, manganites show complex magnetic behaviour with different (simultaneous) types of magnetic ordering, charge ordering, unconventional mechanisms of electrical conductivity, phase separation, memory, and ageing effect. These properties arise from the strong coupling of spin, charge, lattice, and orbital degrees of freedom, and are highly dependent on the chemical composition of manganites, temperature, and applied magnetic field. Despite several decades of intensive research, complex interactions between electrons in manganites are still not well understood, and further investigation is needed.

Calcium manganite CaMnO_3 is known to be an antiferromagnetic insulator. This work focuses on poorly investigated gadolinium-doped calcium manganite $\text{Ca}_{1-x}\text{Gd}_x\text{MnO}_3$. Nanocrystalline samples with $x = 0.05, 0.1, 0.15, 0.2$ were synthesized by a modified glycine-nitrate procedure followed by calcination and sintering at high temperatures. We performed detailed measurements of transport and magnetic properties of the prepared samples in a wide temperature range and high magnetic fields. We found that gadolinium doping causes suppression of the antiferromagnetic order giving rise to new magnetic phases and phase separation, as well as the strong drop of resistivity and appearance of CMR effect.

**Invited**

In-Situ Techniques for Perovskite Layer Growth Monitoring: X-ray Scattering and Photoluminescence

Peter Siffalovic¹, Nada Mrkyvkova¹, Karol Vegso¹, Peter Nadazdy¹, Martin Ledinsky², Ales Vlk², Quentin Guesnay³, Christian M. Wolff³, Daming Zheng⁴, Thierry Pauporte⁴, Frank Schreiber⁵

¹ Institute of Physics, SAS, Dúbravská cesta 9, 84511 Bratislava, Slovakia

² Institute of Physics, CAS, Cukrovarnická 10, 162 00 Prague 6, Czech Republic

³ Ecole Polytechnique Fédérale de Lausanne (EPFL), Neuchâtel 2002, Switzerland

⁴ Chimie ParisTech, PSL Research University, CNRS, F-75005 Paris, France

⁵ Institute of Applied Physics, University of Tübingen, 72076 Tübingen, Germany

email: peter.siffalovic@savba.sk

Metal halide perovskites, a class of hybrid organic-inorganic materials, offer exceptional optoelectronic properties, making them prime candidates for next-generation solar cells and radiation detectors. This review traces the evolution of perovskite thin film fabrication from traditional liquid-deposition methods to vacuum co-deposition and cutting-edge chemical vapor deposition techniques. A key focus is on *in-situ* characterization techniques that can enhance thin film performance by reducing defects and improving crystallinity. In particular, we highlight the combined power of *in-situ* grazing-incidence wide-angle X-ray scattering (GIWAXS) and photoluminescence (PL) in probing both structural and optical properties. Through real-world examples, such as perovskite solar cells, we demonstrate how this tandem approach can drive advancements in perovskite-based devices.

Oral

Plasma-Assisted Vapour Thermal Deposition for Controlled Deposition of Nanocomposites

Jaroslav Kousal¹, Zdeněk Krtouš^{1,2}, Pavel Pleskunov¹, Tereza Košutová^{1,3}, Milan Dopita¹,

Bill Baloukas², Ludvík Martinů²

¹ Charles University, Faculty of Mathematics and Physics, Prague, CZ

² Polytechnique Montreal, Department of Engineering Physics, Montreal, CA

³ Uppsala University, Faculty of Science and Technology, Uppsala, SE

email: jaroslav.kousal@mff.cuni.cz

Plasma polymerization, or plasma-enhanced chemical vapour deposition (PECVD), is widely used for depositing organic thin films. Despite its popularity, it often results in films with limited molecular complexity. This is partly because it relies on relatively low molar mass precursors that can be vaporized into the gas phase. Plasma-assisted vapour thermal deposition (PAVTD) was developed to address this limitation.

In PAVTD, a solid polymer is heated in a crucible, causing thermal degradation (evaporation) and in-situ formation of oligomers heavier than typical PECVD precursors (10^2 - 10^3 g.mol⁻¹). These oligomers are subsequently re-polymerized in RF plasma, resulting in films that can exhibit properties characteristic of classical polymer physics and chemistry, which is uncommon for plasma polymers. This method enables fine-tuning properties such as biodegradability and hydrolyzability, as demonstrated in polylactic acid-based films [1,2].

PAVTD effectively bridges the gap between the composition and properties of classical and plasma polymers. However, its batch processing presents challenges in terms of deposition duration and stability. To overcome these challenges, continuous-PAVTD was developed, employing standard FDM 3D printing filaments. This advancement improves stability and increases deposition rates (up to several nm/s), making PAVTD a more practical deposition method and a valuable tool for exploring plasma polymerization processes. Moreover, PAVTD can be integrated with other deposition techniques. This versatility of PAVTD was demonstrated by the preparation of polymer-metal nanocomposites with PLA-like matrix using two different filler fabrication methods: magnetron sputtering and gas aggregation source of nanoparticles. The precise control achievable with PAVTD was utilized to produce nanocomposite-based Bragg's multilayer reflectors.

Acknowledgements: This work was supported by the grants GA22-21007S of the Czech Science Foundation and GAUK 411822 of the Grant Agency of Charles University.

[1] Krtouš et al., Materials, 2021, vol. 14, pp. 459.

[2] Krtouš et al., Surface and Coatings Technology, 2021, vol. 421, 127402

Oral

Optically driven thin film OECT electrochemical sensor

Vedran Đerek

Department of Physics, Faculty of Science, University of Zagreb, Bijenička c. 32, 10000 Zagreb, Croatia

email: vdjerek@phy.hr

Thin film organic electrochemical transistors (OECTs) made from poly(3,4-ethylenedioxythiophene) polystyrene sulfonate (PEDOT:PSS) are extensively utilized in highly sensitive biosensors. With suitable gate or channel functionalization, they are effective for bio-sensing and bioelectronic readout applications. For implantable sensor applications, these devices should ideally function fully wirelessly, with wireless power supply, gating, and readout capabilities. Moreover, they should be manufactured on flexible and stretchable substrates to conform well to various tissue shapes. We present methods for the wireless powering and electrical readout of implanted electrochemical sensors based on OECT devices. We will demonstrate our method for wirelessly gating OECTs using a gate electrode modified with an organic, capacitively coupled, photovoltaic-like stack. This stack consists of a vertical tandem of metal-free phthalocyanine (H₂PC) and N,N'-dimethyl perylenetetracarboxylic diimide (PTCDI), deposited by thermal vacuum evaporation and enhanced with PEDOT:PSS to increase electrode capacitance. Additionally, we will present external readout strategies that do not depend on complex implanted electronic components.

Invited**Assessing and enhancing fracture toughness of hexagonal diboride coatings**

R. Hahn¹, A.A. Tymoszuk¹, T. Wojcik¹, E. Ntemou², K. Boebel³, P. Polcik⁴, S. Kolozsvári⁴, D. Primetzhofer², P.H. Mayrhofer⁵, and H. Riedl^{1,5}

¹ *Christian Doppler Laboratory for Surface Engineering of high-performance Components, TU Wien, 1060 Vienna, Austria*

² *Department of Physics and Astronomy, Uppsala University, SE-75120 Uppsala, Sweden*

³ *Oerlikon Balzers, Oerlikon Surface Solutions AG, 9496 Balzers, Liechtenstein*

⁴ *Plansee Composite Materials GmbH, D-86983 Lechbruck am See, Germany*

⁵ *Institute of Materials Science and Technology, TU Wien, A-1060 Wien, Austria*

email: rainer.hahn@tuwien.ac.at

Coherently grown nanolayered PVD thin films, referred to as superlattice thin films, are known for their superior hardness compared to monolithically grown constituents. By employing in-situ micromechanical cantilever bending tests, we have shown that the fracture toughness also shows a significant bilayer period-dependent behavior. While mechanisms based on dislocation activity explain the hardness peak, the linear elastic deformation of the microcantilever during the fracture experiments suggests that these explanations are not directly applicable to describe the enhancement in fracture toughness. Consequently, an underlying, bilayer-period-dependent intrinsic property is responsible for this behavior.

This contribution presents an overview of the ceramic superlattice systems deposited so far, their increase in hardness and fracture toughness, and a mechanistic consideration of the increase in these properties. For this purpose, we selectively deposited systems, which differ in the two decisive factors for increasing the mechanical properties, the shear modulus difference ΔG and the difference in the lattice parameters Δa . While our TiB₂-WB₂ systems show a pronounced difference in G , their lattice parameter is very similar, contrary to our TiB₂-ZrB₂ systems, having similar elastic properties while showing a pronounced difference in their crystallographic properties. We unravel the active mechanisms responsible for the respective increases in H and K_{IC} by performing the same micromechanical tests on these novel diboride coatings. Specifically, the TiB₂-ZrB₂ coatings showed an increase in K_{IC} up to 3.7 MPa·m^{0.5}, while the TiB₂-WB₂ system experienced an increase in hardness to 45.5 GPa, both without a significant increase of the other mechanical properties. These results and investigations, especially the systematic design of the study, allow a targeted development of protective coatings.



Plenary

2D Boron Carbon Nitride structures: from synthesis to application

László Óvári^{1,2}

¹ HUN-REN-SZTE Reaction Kinetics and Surface Chemistry Research Group, Rerrich B. tér 1, H-6727 Szeged, Hungary

² Extreme Light Infrastructure ALPS, Wolfgang S. u. 3, H-6728 Szeged, Hungary

email: Laszlo.Ovari@eli-alps.hu

Graphene is a well-known 2D semimetal with many attractive properties, while hexagonal boron nitride (h-BN) is its structural counterpart. The different electronegativities of its constituting B and N atoms, however, result in a large bandgap (~6 eV), which makes this stiff and inert material an ideal insulating element of nano-heterostructures. Moreover, periodically undulating h-BN monolayers are good templates. The combination of all three elements in the same lattice has attracted a lot of attention in order to tailor material properties, such as band gap. However, there is a strong tendency for phase separation into graphene and h-BN, which makes the synthesis very difficult. We started our investigations with corrugated h-BN nanomesh monolayers and proved that applying surface alloys as substrates it is possible to tune its structural parameters. Besides, the enhancement of the local work function nanopatterning has also been achieved, which is highly relevant for non-invasive surface templating, a promising route towards designing large-scale artificial atomic and molecular nanostructures with tailored chemical, quantum or spin functionalities. As a next step, we prepared metal nanoparticles on h-BN to obtain model catalysts and studied thermal processes with and without adsorbed molecules. Examples for catalytic studies related to the transformation of ethanol and acetaldehyde will be presented. In an attempt to synthesize ordered BCN monolayers on metals, the decomposition of benzene borazine mixtures with different ratios has been studied. It turned out the surface BCN stoichiometry is very different from the gas phase, but at proper conditions intimately mixed well ordered 2D layers were obtained on Rh(111). The applied methods span core level and angle resolved valence band photoemission (momentum microscopy), other electron and ion spectroscopic methods, STM and DFT calculations.

**Invited****Me-B-C coatings - hard and fracture resistant material**

P. Vašina¹, P. Souček¹, S. Debnárová¹, M. Alishahi¹, S. Mirzaei¹, M. Kroker¹, L. Záborský¹, V. Buršíková¹, Zs. Czigány², K. Balázsi², M. Hans³, D. Holzapfel³, S. Mráz³, J. Schneider³, V Sochora⁴

¹Masaryk University, Brno, Czech Republic

²Centre for Energy Research, Budapest, Hungary

³RWTH Aachen, Aachen, Germany

⁴SHM, Sumpperk, Czech Republic

email: vasina@physics.muni.cz

Binary borides and binary carbides have been known for many decades. Their outstanding mechanical, electrical and thermal properties made them indispensable in the industry, either in bulk or as thin films. The idea of combining these systems into a ternary X-B-C system naturally evolved. Such systems in the form of bulk have been investigated since the 1950s. The X has been from all of the s, p d and f blocks of the periodic table of the elements. Different structures were found. The orthorhombic Mo₂BC phase, being the first with the X₂BC stoichiometry, was described by Jeitschko in 1963 [1]. This structure attracted the interest for its superconducting properties. Sixty years later, this is still the only synthesised X₂BC phase.

A renaissance of the X₂BC phases, this time in the form of the thin films, has begun in 2009 when the Mo₂BC phase was prepared by direct current magnetron sputtering [2]. This phase was no longer studied for its superconducting properties, in which other materials superseded it, but for its highly unusual combination of high hardness and moderate ductility. Theoretical studies describing other crystalline ternary X₂BC phases predicting the thermodynamic possibility of their preparation together with even better mechanical properties followed [3]. Since then, several different systems from these predictions have been studied, including W-B-C, Nb-B-C and Ta-B-C. No definitive proof of the existence of any X₂BC phase apart from the original Mo₂BC phase was found. This contribution will cruise through the ups and downs of this research in the last decade. It will be shown that thin films from these systems can have interesting mechanical and thermal properties even without the formation of the desired and elusive X₂BC phase. It will be discussed why these phases won't form even under energetically very harsh conditions such as HiPIMS. We will also sketch the possibilities for the future directions of the studies of the X₂BCs.

[1] W. Jeitschko, H. Nowotny, F. Benesovsky, Monatshefte für Chemie und verwandte Teile anderer Wissenschaften 94 (1963) 565–568

[2] J. Emmerlich, D. Music, M. Braun, P. Fayek, F. Munnik, J. M Schneider, J. Phys. D: Appl. Phys. 42 (2009) 185406

[3] H. Bolvardi, J. Emmerlich, M. to Baben, D. Music, J. von Appen, R. Dronskowski, J.M. Schneider, J. Phys.: Condens. Matter 25 (2013) 045501

Oral**Refractory high-entropy nitride coatings deposited by reactive direct current magnetron sputtering**

Žan Gostenčnik^{1,2}, Aljaž Drnovšek¹, Matjaž Panjan¹, Matej Drobnič¹, Domen Korbar¹, Miha Čekada^{1,2}

¹*Jožef Stefan Institute, Department of Thin Films and Surfaces, Jamova cesta 39, Ljubljana, Slovenia*

²*Jožef Stefan International Postgraduate School, Jamova cesta 39, Ljubljana, Slovenia*

email: zan.gostencnik@ijs.si

Since its introduction in 2004, high-entropy materials have been extensively researched. These materials have remarkable properties which lead to a wide range of applications. High-entropy nitride coatings have gained attention as potential candidates for protective coatings due to their superior mechanical and thermal properties. Especially promising are coatings that contain refractory elements, due to their strong bonding with nitrogen. In our work, high-entropy nitride coatings containing six different refractory elements were deposited using reactive direct current magnetron sputtering with the nitrogen flow ratio f_N ($f_N = N_2 / (Ar + N_2)$) ranging from 0 to 50 % at constant total gas flow. The aim was to study the effect of nitrogen concentration on microstructure and crystal structure, as well as mechanical and corrosion properties. To analyze the microstructure and crystal structure, we employed X-ray diffraction (XRD), atomic force microscopy (AFM) and scanning electron microscopy (SEM). For assessing mechanical properties, we utilized nanoindentation and profilometry techniques. The corrosion resistance of the coatings was evaluated through potentiodynamic polarization measurements. Nitrogen concentration increased with the nitrogen flow ratio non-linearly. Results from X-ray diffraction (XRD) show an amorphous crystal structure for the coating without nitrogen and the fcc crystal structure for nitride coatings. Scanning electron microscopy revealed a columnar cross-section morphology. Hardness and reduced elastic modulus peaked at $f_N = 40\%$. Coatings exhibit an increased resistance against corrosion.

Oral

EDIC intensity correction of electron diffraction

Erzsébet Dodony^{1,2}, Balázs Rudd^{n.a.}, István Dodony^{n.a.}, György Sáfrán¹

¹HUN-REN, CER, Thin Films Dept., Konkoly-Thege M. St. 29-33, Budapest H-1121, Hungary

²ELTE, Dept. of Material Physics, Pázmány Péter Sétány 1/A, Budapest, H-1117, Hungary

email: dodony.erszebet@ek.hun-ren.hu

With advancements in nanotechnology, understanding materials at the atomic level is crucial. Transmission electron microscopy (TEM) stands out among several methods for this purpose. High-resolution TEM (HRTEM) images and electron diffraction (ED) patterns are key in determining material structures but require corrections due to the microscope's transfer function and the Ewald sphere-reciprocal lattice distance.

The structure factors (F_{hkl}) of a crystal reveal its atomic arrangement, but the detected diffracted intensity (I_{hkl}) is not directly proportional to the square of the structure factors (F_{hkl}^2) due to the Ewald sphere-reciprocal lattice distance. In 1992, J.M. Cowley established the fundamentals of Ewald correction [1], defining the relationship between experimental intensity and structure factors.

Expanding on Cowley's work, we defined a correction function to derive $|F_{hkl}|^2$ -proportional I_{hkl} values from experimental intensities [2]. This corrected dataset is suitable for accurate crystal structure determination. We also extended this correction method to misoriented crystals. Manual application of these corrections is time-consuming, especially for crystals with large unit cells and hundreds of reflections.

To address this, we developed a computer program (EDIC) to automate the correction process. The program allows rapid intensity correction of experimental ED patterns, enabling the determination of unknown structures from experimental intensity datasets (I_{hkl}) with improved accuracy.

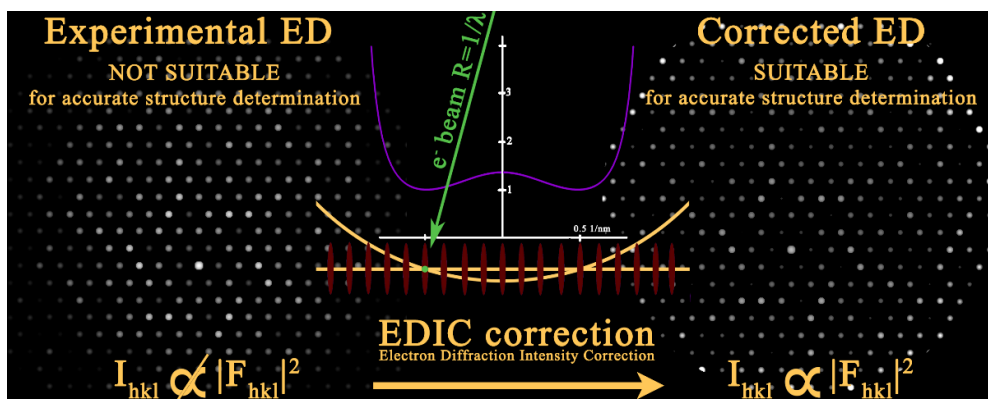


Figure 1. Concept of EDIC correction for a misaligned crystal. Our method recovers the theoretical $I_{hkl} \propto |F_{hkl}|^2$ intensities from experimental I_{hkl} intensities determined by the relationship between the elongated diffracted intensities and the Ewald sphere

[1] Cowley, J.M. (1992) In "Electron Diffraction Techniques", J.M. Cowley, ed., Oxford Univ.Press, Oxford Vol. 1.

[2] E. Dodony, I. Dódony, Gy. Sáfrán, EDIC intensity correction of electron diffraction, Micron, (2024)

**Invited**

Ion beams for high fluence irradiation testing and characterization of materials

Pavol Noga¹

*¹Slovak university of technology in Bratislava,
Faculty of materials science and technology in Trnava,
Advanced technologies research institute,
Jána Bottu 25, 91724 Trnava, Slovakia*

email: pavol.noga@stuba.sk

Ion beams are invaluable tools for materials qualification and testing across diverse applications, including nuclear power, aerospace, and electronics. In the nuclear industry, the traditionally lengthy process of materials qualification can be accelerated by using ion accelerators to evaluate irradiation damage in newly developed structural as well as functional materials or electronic devices. The only drawback in comparison with neutron irradiation using research reactors is the very low thickness of the damaged layer. The typical irradiation experiment comprises one ion implantation step, which modifies around 1-3 micrometers of the sample, resulting in a graded layer and damage profile. To overcome this limitation, we employ a multi-step approach that produces a much thicker (up to 70 μm) and homogeneously irradiated layer. This method enables subsequent micromechanical testing and assessment of engineering-relevant material properties, providing a more comprehensive evaluation of the material's performance under irradiation.

On the other hand, ion beam analysis offers high sensitivity materials analysis, providing detailed isotope-resolved information on the elemental composition, detection and quantification of trace impurities, including light elements down to hydrogen at ppm concentrations. The latter gains importance with the spread of hydrogen production, transport and storage systems as well as lithium batteries, where the understanding of diffusion and migration of these elements is of critical importance. It can also assess the crystallinity of the sample, or, the degree of damage/amorphization, which is particularly useful in semiconductor processing.

Oral**Ion beam irradiation and analysis of materials for radiation environments**

Zoltán Száraz¹, Noga Pavol¹, Jozef Dobrovodský¹

¹*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology in Trnava, Advanced Technologies Research Institute, Jána Bottu 25, 91724 Trnava, Slovakia*

email: zoltan.szaraz@stuba.sk

Ion irradiation is widely used as a screening tool for the development and qualification of innovative materials in irradiation environments. Over the past decades, it has been applied in fission and fusion reactor materials research, accelerating exposure and simulating space radiation conditions. Ion irradiation has proven to be an effective surrogate for neutron irradiation, allowing for the study of fundamental radiation effects on materials. Irradiation-induced defects and transmutation-produced impurity atoms can increase the strength and hardness of materials. However, this enhancement often comes with irradiation embrittlement and a deterioration of mechanical properties, such as ductility, fracture toughness, and dimensional stability.

With ion irradiation, the localized damage within a shallow surface necessitates small-scale mechanical testing, making nanoindentation a critical method. Nanoindentation provides convenient measurement of indentation hardness as a function of penetration depth on a nanoscale. The combination of ion irradiation and nanoindentation has been extensively used as a screening method for assessing irradiation-induced hardening in structural materials.

Accelerated ion beams are also utilized for materials characterization. Ion beam analysis (IBA) techniques enable the acquisition of compositional depth profiles of near-surface regions in thin films. IBA is known for its high sensitivity and does not require reference materials for elemental analysis. At MTF STU, we have a state-of-the-art Time-of-Flight Elastic Recoil Detection Analysis (ToF ERDA) spectrometer, which provides comprehensive information on a sample's elemental composition in a single measurement. This includes depth profiles of light impurities and the elemental composition of the matrix, ranging from hydrogen to uranium. A notable feature of ToF ERDA is its capability to detect and quantify trace amounts of light elements, such as hydrogen and helium.

In this contribution, we present our results on the investigation of ion-induced radiation damage and its effects on the mechanical properties of various candidate structural materials using nanoindentation and ToF ERDA analysis.

Acknowledgment

This work was performed under the support of the grant Agency VEGA under contract 1/0558/24, and the Slovak Research and Development Agency under contract SK-SRB-23-0035.

Oral**Mechanism of nanostructure formation on metal surface by an impact of slow highly charged ions under arbitrary angle of incidence**

Milena D. Majkić¹, Nataša N. Nedeljković², Dimitrije P. Majkić³

¹University of Priština-Kosovska Mitrovica, Faculty of Technical Sciences, Knjaza Miloša 7 38220 Kosovska Mitrovica, Serbia

²University of Belgrade, Faculty of Physics, P.O. Box 368, 11001 Belgrade, Serbia

³School of Electrical and Computer Engineering, Academy of Technical and Art Applied Studies, 11000 Belgrade, Serbia

email: milena.majkic@pr.ac.rs

We adapt our recently developed cohesive energy model (CEM) [1] to comprehensively examine how impact geometry affects nanostructure formation on metal surfaces by an impact of slow highly charged ions (HCI). The model comprises two steps.

In the CEM I step, we use the micro staircase model based on the quantum two-state vector model (TVM) [2] for studying the neutralization process above the surface, resulting in the neutralization energy deposition [2] and the ion-atom interaction potential model for studying the kinetic energy loss as a result of collisional cascade below the surface [3]. The outcome of the processes above and below the surface is the total energy deposition into the solid inducing the rearrangement of atoms and target destabilization which contribute to the materials' morphology alteration [3]. The synergy between the neutralization energy and deposited kinetic energy enables us to define the threshold in ionic velocity, known as the critical ionic velocity [3,4], which is associated with the specific nanostructure formation. When neutralization energy dominates, hillock-like structures are expected, whereas crater-like formations emerge in the case of kinetic energy loss dominance.

Furthermore, according to our model, the formation of specific nanostructures depends on both the ion velocity [3] and chosen collision geometry [5]. Thus, particular nanostructures can be intentionally created by tuning the ion velocity and impact geometry [5].

In the subsequent CEM II step, we incorporate the concept of cohesive energy, considering surface modification as a consequence of alterations in solid cohesive energy due to total energy deposition [1]. This approach allows us to derive a general expression for nanostructure diameters across various ion-surface systems. We point out that the CEM diameters of surface nanostructures depend on charge and velocity, aligning with recent experimental data in the case of normal incidence [6].

[1] N. N. Nedeljković, M. D. Majkić, D. Banaš, I. Stabrawa, *Vacuum* **224** (2024) 113136.

[2] N. Nedeljković et al., *J. Phys. B: At. Mol. Opt. Phys.* **49**, 125201 (2016)

[3] M. D. Majkić and N. N. Nedeljković, *Vacuum* **190** (2021) 110301.

[4] N. N. Nedeljković and M. D. Majkić, *Eur. Phys. J. D* (2023) 77:3.

[5] M. D. Majkić and N. N. Nedeljković, to be published

[6] I. Stabrawa et al., *Vacuum* **210** (2023) 111860.

Oral – sponsor presentation

Enhancing Magnetic Sensing & Next-Gen AR Devices –
Superior Performance with Ion Beam Processing

Andrea Schulze

scia Systems GmbH, Chemnitz, Germany

email: info@scia-systems.com

This presentation highlights the capabilities of ion beam processing, especially ion beam etching (IBE), in producing ultra-precise surface structures. The tunnel-magneto-resistance effect (TMR) is used in modern high-precision sensors ranging from angular position sensors in the automotive industry to read-out sensors in the hard-disk-drive industry. TMR sensors leverage the tunnel magnetoresistance effect, which occurs in a magnetic tunnel junction (MTJ), consisting of two ferromagnetic layers separated by a thin insulating layer. The multilayer composition of the TMR sensor leads to issues regarding the necessary etching process for electrically contacting the sensor. Using argon ions, IBE can accurately remove magnetic layers without causing corrosion, a common issue with chemical etching methods. This results in high-quality sensors with better thermal stability and increased signal output. In addition, another area of application is highlighted: the advancing waveguide fabrication for Augmented reality (AR) devices. AR glasses are built to enrich real-world images with additional digital information. This will be useful for applications such as assembly instructions or medical surgery support, where detailed information must be shown at the correct spot while keeping the hands of the user free. Ion beam etching plays a crucial role in fabricating optical waveguides, particularly slanted surface relief gratings. These gratings are essential as in- and out-couplers of light into and out of the waveguide to produce lightweight near-eye AR displays. IBE allows the creation of complex structures with high accuracy, essential for the precise light guidance required in AR applications.

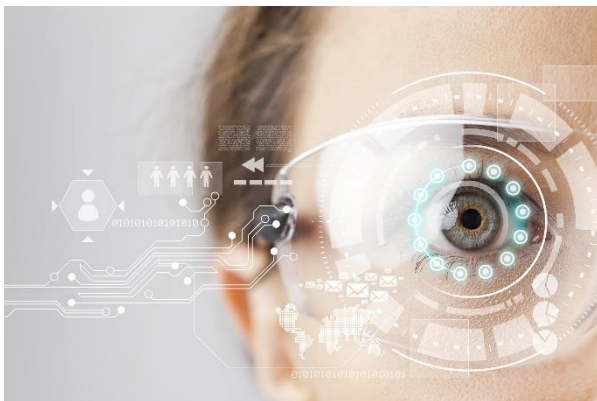


Figure 1. SRG for AR devices



Figure 2. scia Mill 200



Invited

Semi-continuous metal films as building blocks for optical coatings

Jordi Sancho-Parramon¹, Elizabeth Hedl², Nirmala Maria D'Souza³, Željko Samec¹, Vesna Janicki¹,
Vesna Blažek Bregović¹

¹Ruđer Bošković Institute, Bijenička cesta 54, Zagreb 10000, Croatia

²Zagreb University of Applied Sciences, Vrbik 8, Zagreb 10000, Croatia

³Institute of Physics, Bijenička cesta 46, Zagreb 10000, Croatia

email: Jordi.Sancho.Parramon@irb.hr

Optical coatings have traditionally relied on stacking dielectric (non-absorbing) layers with thicknesses comparable to the wavelength and exploiting the interference effects among the multiple beams reflected at the interfaces between layers. In recent years, novel coating designs have been proposed based on the use of highly lossy materials that enable, for instance, obtaining perfect absorption using layers with thicknesses much smaller than the wavelength [1]. In this talk, we will explore the use of semi-continuous metal films for optical coating design. We will first review how these films, formed during the island growth mechanism of metals on dielectric surfaces, exhibit highly tunable optical properties linked to their morphology. Thus, the film optical response can encompass the localized surface plasmon resonance of isolated particles, the infrared-enhanced absorption of metal islands aggregates and the Drude-like response of a percolated metal network. Next, it will be shown how these films can be incorporated into multilayer systems to create optical coatings with multiple functionalities. The focus will be on asymmetric Fabry-Perot resonators, which exhibit diverse optical responses depending on the morphology of the top semi-continuous metal layer. Such multilayer structures can be used to optically detect temperature changes exploiting the morphological changes induced in the film upon thermal annealing [2]. Overall, it will be illustrated how the rich optical behaviour of semi-continuous metal films combined with their ease of production using well-established thin film technology, make them attractive building blocks for innovative optical coatings.

[1] Kats, M. A., Blanchard, R., Genevet, P., & Capasso, F. (2013). Nanometre optical coatings based on strong interference effects in highly absorbing media. *Nature materials*, 12(1), 20-24.

[2] Hedl, E., Samec, Ž., Blažek Bregović, V., Bergmann, A., & Sancho-Parramon, J. (2024). A coating design to rule them all: asymmetric Fabry-Perot resonators with diverse optical response based on Au films with high-temperature sensitivity. *Optics Letters*, 49(15), 4102-4105.

Oral

ITO nanostructures for label free electro-optical modulated LMR sensing.

Pavel Curda¹, Mateusz Śmietana^{2,3}, Dariusz Burnat², Bartosz Janaszek², Marcin Kieliszczyk²,
Petr Sezemsky¹, Marcin Koba^{2,4}, Vitezslav Stranak¹, and Paweł Szczepański^{2,4}

¹University of South Bohemia, Branisovska 31, 37005 Ceske Budejovice, Czech Republic

²Warsaw University of Technology, Institute of Microelectronics and Optoelectronics,
Koszykowa 75, 00-662 Warsaw, Poland

³Łukasiewicz Research Network – Institute of Microelectronics and Photonics,
Al. Lotników 32/46, 02-668 Warsaw, Poland

⁴National Institute of Telecommunications, Szachowa 1, 04-894 Warsaw, Poland

email: pcurda@jcu.cz

Physical vapor deposition and atomic layer deposition are vacuum based techniques for preparation of thin films and nanostructures, that found a great use in fabrication of variety of sensors and biosensor. This study investigates the effects of forming of a thin dielectric layer on the optical, electrochemical, and electro-optically modulated responses of indium tin oxide (ITO)-coated optical fiber sensors. ITO's properties, including optical transparency, high refractive index, and electrochemical activity, make it suitable material for lossy-mode resonance (LMR) effect in the optical domain while also functioning as an electrode in the electrochemical domain. The dielectric layer on the ITO surface was precisely created to the nanometer scale using atomic layer deposition (ALD). This serves as a benchmark for forming biological or chemical layers in label-free sensing applications with these dual-domain sensors. It was found that the sensor exhibits responses in both the optical and electrochemical domains upon dielectric coating formation on the ITO surface. Numerical and experimental analyses demonstrated that the dielectric layer significantly influences the effectiveness of electro-optical modulation. Changes in ITO's refractive index and extinction coefficient at its interface with the layer are induced by modulating the density of free charge carriers. The study showed that dielectric layer thickness changes, down to sub nanometer, can be precisely monitored with modulation. Such precision is challenging to achieve with standard optical measurements. These findings present new opportunities for employing electro-optical modulation in label-free sensing and biosensing, particularly when detecting small biological species such as pollutants in wastewaters or small concentrations.

Oral

Thin ZnO films prepared by plasma-enhanced atomic layer deposition for enhanced photocatalytic applications

Aleš Omerzu¹, Daria Jardas Babić¹, Robert Peter¹, Krešimir Salamon², Tina Radošević³, Damjan Vengust³, Matejka Podlogar³


¹*Faculty of Physics and Centre for Micro- and Nanosciences and Technologies, University of Rijeka, Rijeka 51 000, Croatia*

²*Ruđer Bošković Institute, Bijenička cesta 54, Zagreb 10 000, Croatia*

³*Jožef Stefan Institute, Jamova 39, Ljubljana 1000, Slovenia*

email: aomerzu@uniri.hr

Atomic layer deposition (ALD) is an advanced deposition technique that allows us to synthesize high-quality thin ZnO films. By varying the parameters for thin film synthesis, different structural and physical properties of the films can be obtained [1-4]. The most important synthesis parameter is the deposition temperature. In thermal ALD, the temperature range for the deposition of high-quality films is between 120 °C and 180 °C. An upgrade of conventional ALD is plasma-enhanced atomic layer deposition (PEALD), which enables deposition at lower temperatures without impairing the film quality and growth rate. The photocatalytic activity of the films deposited by the PEALD method shows a maximum value for films deposited at temperatures below 100 °C, and their efficiency is higher than that of the best thermal ALD films. In the present study, we compared the crystal structure, optical properties and photocatalytic activity of thin films deposited at 60°C, 80°C, 100°C and 200°C using the PEALD method. The TEM images show that the films synthesized at lower temperatures have smaller, roundish grains, while the films synthesized at higher temperatures consist of larger, elongated crystals that are perpendicular to the substrate. The smaller grain structure has a much higher concentration of localized surface states, resulting in better photocatalytic activity.

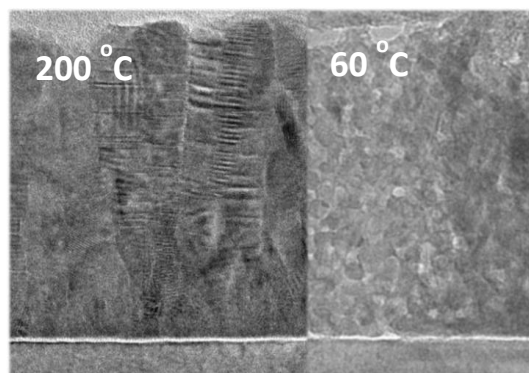

[1] A. Omerzu et al. (2021), *Surfaces and Interfaces*, 23, 100984.

[2] R. Peter et al. (2020), *J. Phys. Chem. C*, 124 (16), 8861-8868.

[3] V. Rogé et al. (2015) *J. Mater. Chem. A*, 3 (21), 11453-11461.

[4] M. Napari et al. (2017) *Surf. Coat. Technol.* 326, 281-290.

Invited**Nanomechanical characterization of solid-state Li-ion battery components**

Robert Kun¹, Dávid Ugi^{1,2}, Péter Dusán Ispánovity²

¹ *HUN-REN Research Centre for Natural Sciences, Institute of Materials and Environmental Chemistry, Magyar Tudósok Körútja 2, 1117 Budapest, Hungary*

² *Eötvös Lóránd University, Department of Materials Physics, Pázmány Péter Sétány 1/a, 1117 Budapest, Hungary*

email: kun.robert@ttk.hu

Recently, the demand for safe, reliable portable power has risen, triggering significant research on solid-state batteries (SSB) as high-performance alternatives to conventional lithium-ion batteries. In fact, during electrochemical cycling extreme volume change, strain, mechanical degradation of the solid/solid interfaces of the SSB can occur which eventually results in battery cell failure. In this presentation, a comprehensive nanomechanical investigation of amorphous and crystalline modification of MoO₃ cathode active material and Lithium phosphorous oxynitride (LiPON) solid state electrolyte is discussed. Understanding the mechanical behavior of the thin-film electrodes and solid electrolyte layers is crucial for the development of more durable and reliable SSBs. Nanomechanical properties of the electrode layers were analyzed by custom developed in situ nanoindenter [1] along with acoustic emission studies. We found that amorphous-type electrode materials are more durable against electro-chemo-mechanical-aging related battery performance loss in all-solid-state Li-ion batteries compared to their crystalline counterparts. Moreover, previous studies [2] noted unexpected ductility and strain recovery in amorphous LiPON, with sharp-ended tip indentations revealing pile-up formation and densification as the main deformation mechanisms. Our work presents nanoindentation experiments with a spherical tip, revealing a novel mechanical behavior—a sudden deformation event followed by slow strain recovery during unloading. This unique deformation is likely linked to the material's special structure, featuring isolated phosphate tetrahedra embedded in a Li matrix with occasional N bridge bonds between tetrahedra.

Keywords: Solid state batteries, Li-ion batteries, nanoindentation, plastic instability, strain recovery, MoO₃, LiPON

[1] P. D. Ispánovity, D. Ugi, G. Péterffy, M. Knapek, S. Kalácska, D. Tüzes, Z. Dankházi, K. Máthis, F. Chemelík. Dislocation avalanches are like earthquakes on the micro scale, *Nat Commu.* 13: 1975, 2022.

[2] S. Kalnaus, A. S. Westover, N. Kornblut, E. Herbert, N. J. Dudney. Resistance to fracture in the glassy solid electrolyte LipoN. *J. of Mat Res.* 787-796 p., 2021

**Plenary****Discovery of advanced materials using artificial intelligence methods and advanced characterization techniques**

Maria C. Asensio

Materials Science Institute of Madrid (ICMM/CSIC), Cantoblanco, E-28049 Madrid, SPAIN

&

*MATINÉE, CSIC Associated Unit between ICMM and the Materials Science of the University of Valencia (ICMUV), Madrid, SPAIN*email: mc.asensio@csic.es

Materials are the cornerstone of clean energy innovation, essential for advanced batteries, solar cells, low-energy semiconductors, thermal storage, and CO₂ capture and conversion. However, the lengthy and expensive process of developing new materials—often spanning 10 to 20 years—remains a bottleneck in the shift to a low-carbon future. Hence, significant challenges lie in discovering new materials within a huge chemical space and accomplishing an exhaustive characterization of materials at the sub-micrometre and atomic scales.

In this presentation, I will outline a combined experimental and Artificial Intelligence (AI) approach for discovering and optimizing advanced materials. I will highlight recent AI techniques used to predict novel energy materials with tailored properties, aligned with the Materials Genome Initiative [1]. Additionally, I will briefly describe a deep-learning method using a graph neural network (GNN) model to identify promising energy storage materials, trained with large datasets of structural and electronic properties from sources like the Materials Project, NOMAD, and another extensive database.

The AI-predicted candidates will be experimentally tested using advanced materials characterization techniques, including synchrotron radiation and neutron-based methods. I will present recent results from an innovative k-space nanoscope, Nano-ARPES (Nano Angle-Resolved Photoelectron Spectroscopy), which offers exceptional lateral resolution and robust spectroscopic and electronic characterization at the nano- and mesoscopic scales. This technique reveals the momentum- and spatial-resolved electronic band structure, highlighting the effects of heterogeneities and confinement on valence band electronic states at the Fermi level [2-6].

[1] Materials Genome Initiative for Global Competitiveness, (2011), <https://www.mgi.gov>.

[2] H. Yi, et al., *Appl. Phys. Lett.* 112, 052102 (2018).

[3] Y. Ma, et al., *Nature Communications* 8 (2017) 14231.

[4] K. Sakamoto, et al., *Nano Lett.* (2021) *acs.nanolett.1c01100*. <https://doi.org/10.1021/acs.nanolett.1c01100>.

[5] V.L. Nguyen, et al, *Nat. Nanotechnol.* 16 (2021) 114–116. <https://doi.org/10.1038/s41565-020-00821-z>.

[6] C. Bao, et al., *Commun Phys* 4 (2021) 229. <https://doi.org/10.1038/s42005-021-00733-x>.

Invited

Microstructural Design of Cathodic Arc Deposited fcc-TiAlN Coatings: A Path Toward Sustainable Hard Coatings

Michael Tkadletz¹, Nina Schalk^{1,2}, Christoph Czettl³, Markus Pohler³

¹ *Department of Materials Science, Montanuniversität Leoben,
Franz Josef-Straße 18, 8700 Leoben, Austria*

² *Christian Doppler Laboratory for Advanced Coated Cutting Tools at the Department of Materials
Science, Montanuniversität Leoben, Franz-Josef-Straße 18, 8700 Leoben, Austria*

³ *CERATIZIT Austria GmbH, Metallwerk-Plansee-Straße 71, 6600 Reutte, Austria*

email: michael.tkadletz@unileoben.ac.at

The microstructural design of hard coatings is the key to enhancing wear protection in cutting tools. Through optimized deposition techniques and parameter adjustments, it is possible to boost the performance while maintaining simple chemistries, which contributes to coating sustainability. This presentation explores how factors such as substrate properties and deposition parameters influence the microstructure of coatings synthesized by cathodic arc deposition. In particular, the role of bias voltage as a tool to control the microstructure will be examined, with attention to how cemented carbide substrate characteristics—like phase composition and WC grain size—affect the results. The study demonstrates how substrate-template effects and bias voltage can be used to control texture, crystallite size, and residual stress in fcc-TiAlN coatings. Additionally, Ta alloying along with bias voltage grading during deposition offers further control over microstructural features. While Ta is used as a model element here, future work may focus on replacing it with more sustainable alternatives. This research highlights the potential of microstructural design as a sustainable strategy for tailoring coating performance, providing flexibility to either leverage or mitigate substrate effects based on application needs.

Oral**Novel plasma-supercavitation technology for water cleaning**

Rok Zaplotnik¹, David Dobnik², Arijana Filipić², Martin Petkovšek³, Matevž Dular³, Miran Mozetič¹,
Gregor Primc¹

¹ *Jožef Stefan Institute, Jamova Cesta 39, Ljubljana 1000, Slovenia*

² *National Institute of Biology, Večna pot 121, Ljubljana 1000, Slovenia*

³ *Faculty of Mechanical Engineering, University of Ljubljana, Aškerčeva cesta 6, Ljubljana 1000, Slovenia*

email: rok.zaplotnik@ijs.si

Water scarcity is a critical issue affecting billions globally. Climate change and population growth exacerbate the situation, leading to severe water shortages and impacting health, development, and economies. An increasing number of waterborne pollutants affect the safety of the water environment. One type of these pollutants is also waterborne viruses, such as human, animal or plant viruses. Of human viruses, norovirus, rotavirus and hepatitis are the most problematic and they pose significant health risks. These viruses can lead to diarrhea and gastroenteritis but can also cause other, more serious illnesses. Preventing the spread of waterborne viruses with inactivation is essential for protecting public health.

One of the new technologies that can be used to tackle the problem of micropollutants in water is non-equilibrium plasma. However, so far, the only type of plasma that could be used to treat water was atmospheric pressure plasma [1], where in most studies, only the surface of liquid or small volumes was treated.

To overcome these limitations, we designed a device where plasma can be ignited at sub-atmospheric pressure inside a stable supercavitation bubble that is formed inside a flowing liquid. Our innovative method (US11807555B2) is the first plasma system to synergistically integrate two advanced oxidation technologies: plasma and supercavitation. In our initial research utilizing this method, we used bacteriophage MS2, which is a human enteric virus surrogate. It is the first study where sub-atmospheric plasma was used to inactivate viruses in water.

With our patented method and device [2], we successfully inactivated more than 5 log₁₀ PFU/mL of bacteriophage MS2 in a 0.43 L of recirculating water with under 4 minutes of treatment [3]. Our device is constantly being improved, optimized, and used to inactivate other waterborne micropollutants.

[1] A. Filipić et al., Trends Biotechnol, vol. 38, no. 11, pp.(2020) 1278–1291

[2] G. Primc et al., US11807555B2 (2023)

[3] A. Filipić et al., Environment Inter., vol 182, (2023) pp 108285



Oral

Combination of advanced oxidation technologies for removal of micropollutants

Gregor Primc¹, Rok Zaplotnik¹, Matevž Dular², Martin Petkovšek², Robert Roškar³, Jurij Trontelj³,
Mojca Zupanc²

¹ *Department of Surface Engineering, Jozef Stefan Institute, Jamova cesta 39, 1000 Ljubljana, Slovenia*

² *Faculty of Mechanical Engineering, University of Ljubljana, Aškerčeva cesta 6, 1000 Ljubljana, Slovenia*

³ *Faculty of Pharmacy, University of Ljubljana, Aškerčeva cesta 7, 1000 Ljubljana, Slovenia*

email: gregor.primc@ijs.si

The presence of micropollutants such as pharmaceuticals and endocrine-disrupting chemicals (EDCs) in water bodies, even in concentrations ranging from nanograms per liter to micrograms per liter, poses a significant worldwide problem. These substances can have profound and far-reaching impacts on both environmental and human health. Their presence in drinking water sources raises serious public health concerns, as traditional water treatment processes often fail to effectively remove these contaminants. Therefore, enhanced water treatment methods, including advanced oxidation processes (AOPs), are crucial to address this pressing issue. We have combined two potent AOPs, cavitation, and gaseous plasma, to tackle the removal of several micropollutants (valsartan, sulfamethoxazole, naproxen, diclofenac, tramadol, propyphenazone, carbamazepine, 17 β -estradiol, and bisphenol A) simultaneously in a water matrix, and evaluated their removal rates in terms of varying process parameters, such as plasma power, water temperature and treatment time. The removal rates, yield, and characteristic half-lives ($t_{1/2}$) achieved with the combination of two AOPs are benchmarked toward scientific literature that used atmospheric-pressure plasma jets, dielectric barrier discharges, and pulsed corona and spark discharges. The highest removals of all compounds were achieved at a water temperature of 25 °C, treatment time of 30 min, and plasma power of 53 W. Micropollutants 17 β -estradiol, bisphenol A, and diclofenac were removed to the greatest extent, namely $\geq 89\%$, while the removal of other compounds ranged from 33–65%.



Invited

Unraveling plasma self-organization of magnetron sputtering discharges

Matjaž Panjan

*Jožef Stefan Institute, Jamova 39, 1000 Ljubljana, Slovenia*email: matjaz.panjan@ijs.si

The magnetron sputtering is a widely used plasma-based technique for deposition of high-quality thin films. It is classified by the type of voltage that is applied to the cathode: DCMS (continuous voltage), HiPIMS (high-power impulse voltage) and RFMS (oscillatory voltage). The basic physics of the sputtering process is similar in all regimes. The crossed magnetic and electric field of a magnetron device confines electrons close to the cathode. The electrons gyrate around the magnetic field lines, bounce from the cathode sheath and drift in the $\mathbf{E} \times \mathbf{B}$ direction. Such field configuration greatly extends the trajectories of electrons and increases the probability of gas ionization. However, different motions of electrons ($\mathbf{E} \times \mathbf{B}$ direction) and ions (\mathbf{E} -directed motion) cause spatial separation of charge, which consequently leads to the formation of azimuthally non-uniform plasma structures.

Dense azimuthal plasma structures called spokes have been reported for all types of magnetron sputtering regimes; DCMS [1], RFMS [2] and HiPIMS [3,4]. Spokes typically exhibit a triangular shape, form periodic or semi-periodic patterns and rotate in $-\mathbf{E} \times \mathbf{B}$ direction (DCMS) or $\mathbf{E} \times \mathbf{B}$ direction (HiPIMS). They were observed for various magnetron geometries (planar and cylindrical) and for a wide range of discharge conditions typically used in the deposition of thin films. The universal presence of spokes demonstrates that plasma self-organization is a fundamental process in magnetron sputtering physics. In the talk, I will review the latest findings about the self-organization of plasma in different magnetron regimes and discuss the properties of spokes for a range of discharge currents and working gas pressures.

[1] M. Panjan *et al.*, *Plasma Sources Sci. Technol.*, **24** (2015) 065010

[2] M. Panjan, *J. Appl. Phys.*, **125** (2019) 203303

[3] A. Anders *et al.*, *J. Appl. Phys.*, **111** (2012) 053304

[4] M. Panjan, *Plasma Sources Sci. Technol.*, **33** (2024) 055015

Oral

Upscaling the plasma reactor for the treatment of seeds and seed-borne toxins in agriculture use

Nina Recek¹, Rok Zaplotnik¹, Gregor Primc¹, Miran Mozetič¹, Alenka Vesel¹, Peter Gselman²

¹ *Jožef Stefan Institute, Jamova cesta 39, 1000 Ljubljana, Slovenia*

² *INTERKORN, semenarstvo in obnovljivi viri d.o.o., Gančani 94, 9231 Beltinci*

email: nina.recek@ijs.si

In the scope of an industrial project, “Plasma Grain” (TRL 6-9), we have upscaled and constructed the plasma reactor to the industrial scale. A mobile plasma reactor was built, which fit in the back of the truck and treated large quantities of seeds (up to a kilogram per second). The innovative idea was to treat seeds on the spot and sow them in the soil right after plasma treatment, thus also reducing the CO₂ footprint due to significantly shortened transport routes.

The system was built with two differently coupled plasma reactors: an inductively coupled (IC) and capacitively coupled (CC). Seeds were treated with plasma to eliminate the seed-borne toxins (mycotoxins) for safe use in the food industry and as a feed for a stock. Other seeds were used for planting and were treated to inactivate the fungi and moulds from the surface; thus, a higher germination rate was expected.

Maize (a total of seven hybrids) was treated and sown in the Interkorn fields for two consecutive harvest years. Each year, plant numbers (no. of plants per m²) at emergence and at the tasselling time were recorded, as well as the final yield (kg/ha). Maize grown from untreated seeds served as the control treatment. In two of the four hybrids in the first harvest year, the statistically significant highest yield arose from plants from plasma-treated seeds. In the second harvest year, the highest yield was from plants from plasma-treated seeds in three of the four hybrids [1]. Preliminary results also showed great potential for mycotoxin decontamination from maize using IC plasma. HPLC showed up to a 90% decontamination rate of mycotoxins after plasma treatment.



Figure 1. Mobile plasma reactor for seed treatment.

[1] Recek, N.; Zaplotnik, R.; Vesel, A.; Primc, G.; Gselman, P.; Mozetič, M.; Holc, M. Germination and Growth of Plasma-Treated Maize Seeds Planted in Fields and Exposed to Realistic Environmental Conditions. *Int J Mol Sci* **2023**, *24*, 6868.

Oral

Hydrogen interaction and oxide permeation barrier formation in B2-ordered Fe-Al intermetallic alloy

Ardita Kurtishaj Hamzaj^{1,2}, Marko Žumer¹, Janez Zavašnik^{1,2}, Vincenc Nemanič¹, Uroš Cvelbar^{1,2}

¹Department of Gaseous Electronics (F6), Jožef Stefan Institute, Jamova 39, 1000 Ljubljana, Slovenia

²Jožef Stefan International Postgraduate School, Jamova 39, 1000 Ljubljana, Slovenia

email: ardita.kurtishaj@ijs.si

The interaction of hydrogen with metals is a topic of growing importance due to the challenges in realizing the Hydrogen Economy. Ongoing advances in understanding the properties of metals and alloys have led to the engineered design of materials for targeted applications, including hydrogen storage and transport. [1,2] However, since the interaction of hydrogen with alloys can differ significantly from that with their pure metal constituents, predicting mass transport phenomena is troublesome, and systematic experimental investigations are required. Binary Fe-rich iron aluminide intermetallic alloys are well recognized as structural materials for engineering components operating in harsh environments at elevated temperatures. Upon exposure to air, a protective superficial alumina scale is formed on the surface of Fe-Al, which protects the underlying metal against external agents. [3] This work explores two critical aspects of the B2-ordered Fe₃Al alloy: its interaction with hydrogen and the in-situ formation of a self forming hydrogen permeation barrier. The gas permeation technique was employed to determine the diffusivity and permeability from 200 to 500 °C, a range rarely explored in the literature. Our findings confirmed that the interaction of hydrogen with the Fe₃Al alloy differs substantially from that of the pure metals involved. The in-situ formed aluminium oxide resulted in a highly impermeable layer with a permeation reduction factor greater than 1000. This straightforward method provided a very efficient hydrogen barrier with permeabilities that have not previously been reported [4], except for pure Al, which lacks the mechanical properties of the alloy.

[1]. X. Zhao, L. Ma, Int J Hydrogen Energy, 34 (2009), pp. 4788-4796.

[2]. Y. Xu, et al. Sustainable Energy Technologies and Assessments, 55 (2023), 102974.

[3]. J. Zavašnik et al. Corrosion Science, 179 (2021), 109170

[4.] V. Nemanič, Nuclear Materials and Energy, 19 (2019), pp. 451–457.

Oral

3D Printing of Semiconductors using Electron Tweezers

Iveta Ukropcová^{1,2}, Radek Dao¹, Martin Štubian¹, Miroslav Kolíbal^{1,2}, Tomáš Šíkola^{1,2}, Petr Bátor^{1,2}

¹*Institute of Physical Engineering, Brno University of Technology, Technická 2, Brno 616 00, Czech Republic*

²*CEITEC BUT, Brno University of Technology, Purkyňova 123, Brno 612 00, Czech Republic*

email: ukropcova@vutbr.cz

Our research introduces a novel approach for fabricating germanium microstructures within an ultra-high-vacuum scanning electron microscope (UHV-SEM). The technique combines Electron Tweezers with the Vapour-Liquid-Solid process for growing of nanowires. Electron Tweezers enable precise manipulation of two-component liquid droplets using only the electron beam of the SEM. This phenomenon is not widely explored in current literature. Our research opens new possibilities for in situ manipulation and microfabrication in SEM.

The principle of **Electron Tweezers** manipulation is based on thermomigration. The electron beam exposure creates a local temperature gradient in a germanium substrate and induces a directional thermomigration of nearby AuGe or AlGe droplet. We propose that the temperature gradient in substrate causes a concentration gradient in droplets, leading to in dissolution-diffusion-deposition flow [1] of Ge atoms through the droplet (See Figure 1a).

A horizontal germanium **structure is 3D printed**, when during a deposition of Ge from an effusion cell, a droplet is very slowly moved by the electron beam using a Python script. Behind the slowly moving droplet, a horizontal wire grows through the VLS method. An example outcome of this 3D printing process is in Figure 1b.

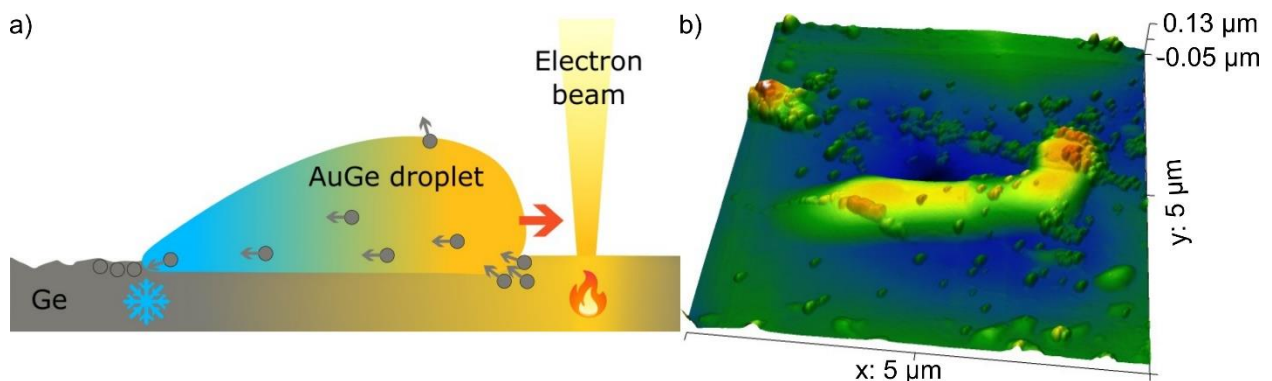


Figure 1. a) AuGe droplet on Ge substrate with temperature gradient induced by the electron beam exposure. The droplet is moving toward the warmer area, i.e., the droplet is following the electron beam. b) AFM image of a germanium structure 3D printed using an electron tweezers.

[1] W. Yang, H. Ade, R. Nemanich, *Phys. Rev. B: Condens. Matter Mater. Phys.* **2004**, 69, 045421.

**Plenary****Practical Functional Oxide Thin Films for Electronic Devices**

Judith MacManus-Driscoll

*Dept. Materials Science, University of Cambridge, 27 Charles Babbage Rd.,
Cambridge, CB3 0FS.*

email: jld35@cam.ac.uk

Opportunities of functional oxides for applications in electronics are huge. However, oxides in electronics are quite scarce. The challenges stem from both intrinsic and extrinsic materials problem, e.g. composition, defect and interface control. Also, current thin film deposition routes cannot always deliver the performance of bulk materials. This talk looks at some of the reasons for the aforementioned challenges and shows ways to overcome them. Recent examples are given focusing on oxides for neuromorphic computing using resistive switching.

Invited

Nanoscale Ferroelectricity and Electrochemical Dynamics in Hafnia-Based Films

Nives Strkalj^{1,2}

¹*Department of Materials Science and Metallurgy, University of Cambridge, Cambridge, UK*

²*Center for Advanced Laser Techniques, Institute of Physics, Zagreb, Croatia*

email: nstrkalj@ifs.hr

The discovery of ferroelectricity in nanoscale films of binary oxides, particularly hafnia, has reignited interest in understanding the emergence of ferroelectric properties at the nanoscale. The unusual size scaling of polarization in these films is a focus of intense investigation. Given the sensitivity of polarization in hafnia-based films to the oxygen content, it has been hypothesized that polarization switching is intertwined with electrochemical reactions. Though these processes have been shown to co-occur, their relationship remains unclear. We conducted direct observations of the electrochemical state within regions exhibiting preset polarization directions in hafnia-based ferroelectric films, employing hard x-ray photoelectron spectroscopy (HAXPES). Our findings reveal more pronounced electrochemical changes in films with lower polarization, suggesting a lack of direct linkage between polarization and electrochemical changes. These results mark progress in unravelling the origins of the ferroelectric response in hafnia-based films.

Oral

Fabrication of NbTiN superconducting nanowire single-photon detector

Ján Šoltýs¹, Iuliia Vetrova¹, Tomáš Ščepka¹, Ján Fedor¹, Štefan Haščík¹, Pavol Neilinger^{2,3}, Martin Baránek², Samuel Kern², M. Grajcar^{2,3}

¹*Institute of Electrical Engineering, Dúbravská cesta 9, 841 04 Bratislava, Slovakia*

²*Department of Experimental Physics, Comenius University in Bratislava, Michala Gregusa 1, 842 48, Bratislava, Slovakia*

³*Institute of Physics, Slovak Academy of Sciences, Dúbravská cesta, Bratislava, Slovakia*

email: jan.soltys@savba.sk

Advances in optical quantum technologies have been achieved thanks to improvements in the performance of single-photon detectors. There are several types of detectors, but superconducting nanowire single-photon detectors (SNSPDs) have proven to be highly promising due to their impressive features, such as almost 100% quantum efficiency, timing jitter of only a few picoseconds, and count rates reaching 10^9 counts/s with minimal number of dark counts [1,2]. Thanks to these properties, SNSPD can be used in many areas, such as photonic quantum computers, quantum cryptography, quantum networks, and space research.

In this work, we describe fabrication technology, which we use to produce single-photon detectors based on a thin superconducting NbTiN film located on a suspended Si_3N_4 membrane. The SNSPD consists of a nanowire (70-150 nm in width) patterned into a meander shape from an NbTiN layer prepared by magnetron co-sputtering. All technological steps must be precisely coordinated to achieve high detection efficiency. This includes designing the shape of the nanowire, i.e. the ratio of its width to the gap (filling factor). The proper composition of the NbTiN layer, as well as the thickness of the bottom reflective layer and the thickness of the membrane, plays a crucial role. Using an electron-beam lithography and an optimized dry etching process, we can repeatedly prepare detectors with a precise meandered shape and a critical temperature of around 11K. The meander was characterized using an AFM and SEM microscope and electrical measurements at low temperatures. The simulations show that thickness-dependent optical conductivity shifts the absorption peak of the nanowire, affecting its optical absorption.

Acknowledgments

This work has been supported by the European Union Digital Europe Programme (101091548), the Recovery and Resilience Plan of SR (1789/2023), by SRDA (No. APVV-20-0425) and Scientific Grant Agency of the SR (VEGA No. 2/0168/22). We thank Dušan Lorenc from International Laser Centre of SCSTI for coupling the detector to optical fiber.

[1] G. N. Gol'tsman, O. Okunev, G. Chulkova, A. Lipatov et al. APL, 79(6): 705, 2001

[2] J. Chang, J. W. N. Los, J. O. Tenorio-Pearl, N. Noordzij et al. APL Photonics, 6(3): 036114, 2021

Oral

Structure and growth of cobalt oxide epitaxial layers


Karel Mašek, Oleksandr Leiko, Josef Mysliveček, Viktor Johánek

*Charles University, Faculty of Mathematics and Physics,
V Holešovičkách 2, Prague 8, Czech Republic*

email: karel.masek@mff.cuni.cz

Previous experiments performed on polycrystalline layers have shown that cobalt oxide layers exhibit interesting catalytic properties in methanol to hydrogen conversion [1]. However, basic research consisting in determination of fundamental physico-chemical properties is performed on model well-defined systems for which the relation between structural and chemical properties can be recognized. Thus, the preparation of the well-defined system and its complete structural description is the first of the studies.

In this work we investigate the growth and structure of well-ordered CoO and Co₃O₄ ultra-thin films prepared on Cu(111) and Ir(100) single crystal surfaces by repeated cycles of metallic cobalt deposition, RF plasma oxidation, and temperature annealing. The films were investigated by Reflection High-Energy Electron Diffraction (RHEED), X-ray Photoelectron Spectroscopy (XPS) and other surface sensitive techniques to describe their surface chemical composition and structure. The diffraction patterns revealed CoO cubic and Co₃O₄ spinel structures with (111) epitaxial plane parallel to the substrate surface. The homogeneous chemical state of the layers and different deposit-substrate interaction for copper and iridium were confirmed by XPS. The formation of cobalt oxide – substrate interface was deduced from RHEED patterns as well as from the XPS measurement. While we were able to prepare both types of cobalt oxide on iridium, only CoO layer has grown on the copper substrate. The results are compared to the layers prepared by Physical Vapor Deposition (PVD) [2].

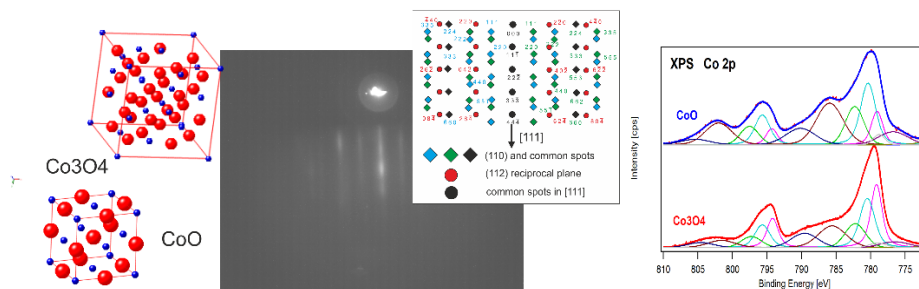

[1] V. Johánek, P. Svenda, K. Mašek, Int. J. of Hydrogen Energy 46 (2021) 17197

[2] V. Uvarov, J. Krutel, K. Mašek, J. Mysliveček, V. Johánek, App. Surf. Sci. 593 (2022) 153430

Invited

Microbiologically induced corrosion of power plant steel components

Barbara Šetina Batič¹, Borut Žužek¹, Jaka Burja¹, Tjaša Danevčič², David Stopar²

¹ Institute of Metals and Technology, Lepi pot 11, 1000 Ljubljana, Slovenia


² Biotechnical Faculty, University of Ljubljana, Jamnikarjeva 101, 1000 Ljubljana, Slovenia

email: barbara.setina@imt.si

Rivers are important sources for the production of green energy that can help reduce greenhouse gas emissions, both directly as a source of power for hydroelectric plants and as a cooling medium for nuclear power plants. In Slovenia 25 % of electric energy is produced by hydroelectric power plants, a large part on the Sava river. In addition, 40 % of electric energy is produced by the nuclear power plant Krško, that uses the Sava river for cooling purposes. Corrosion is a significant threat to material lifespan in an aqueous environment, it can cause major damage to hydroelectric and nuclear power plants if not controlled. Most components are constructed from corrosion-resistant stainless steels, but even these can corrode under certain conditions through Microbiologically Induced Corrosion (MIC).

The data obtained in our research group indicate that MIC can cause a specific turbine blade degradation at hydroelectric power plants and heat exchanger in the nuclear power plant in the lower Sava river. The phenomenon has only occurred in the last few couple of years, and is related to changes in the environment, namely low water flows during the extended dry periods and rising water temperatures. For the time being the phenomenon appears to be locally induced as only one hydroelectric was severely affected. However, with increasing climate change it is expected that prolonged dry periods will be more frequent and when combined with increased river nutrient concentrations and temperatures, more power plants located along the lower Sava river will be affected. A similar phenomenon was observed in the proximally located nuclear power plant Krško cooling system where increased MIC problems were reported over the last couple of regular refits in the power plant.

This contribution will present our latest findings on MIC mechanisms in the power plants, discuss contributing environmental factors, and propose mitigation strategies to enhance the longevity and safety of these critical energy sources.

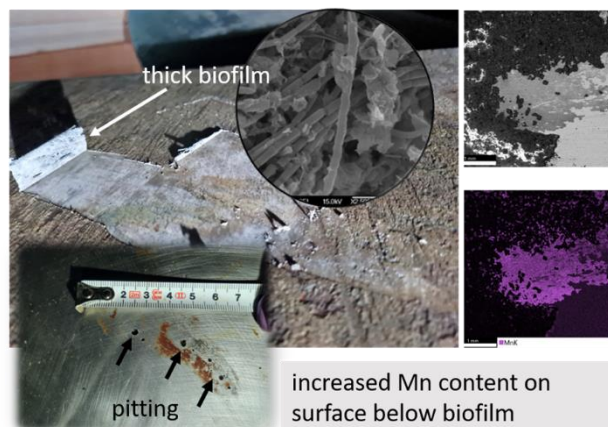

Oral

Alginate-stabilized colloidal ZnO NPs for biomedical applications


Kinga Kutasi¹, Zsolt Tóth²

¹ *Wigner Research Centre for Physics, Budapest, Hungary*

² *Department of Medical Physics and Informatics, University of Szeged, Szeged, Hungary*

email: kutasi.kinga@wigner.hu

The reactive oxygen and nitrogen species and NPs enriched hydrosols/hydrogels are expected to be good candidates for the RONS and metal ions' delivery in the case of different therapies, such as wound healing/disinfection or cancer therapy. It is also expected that hydrosol can retard the dissolution of colloidal NPs. Here we present the indirect plasma assisted deposition of RONS and ZnO NPs into alginate hydrosols. Accordingly, the alginate solutions are prepared from RONS and ZnO NPs enriched water. RONS are deposited into 32 ml of DIW with a surface-wave microwave discharge generated with the help of a *surfatron* wave launcher [1]. The liquid is positioned at 12 mm, from the edge of the discharge tube and treated with an argon discharge for 8 min. Under these conditions nitrite, nitrate and hydrogen peroxide of significant concentrations can be deposited into the treated water [1]. The acidification induced by the plasma treatment is neutralized by using high reduction Zn metal powder during plasma treatment, thus assuring also the stability of the deposited RONS [2]. The ZnO NPs are deposited into the filtrated RONS enriched water by laser ablation of Zn foil [3]. The 1064 nm Nd:YAG laser is focused using a 250 mm lens on the target positioned from the lens at 125 mm distance in 20 ml solution. The energy delivered to the target surface is 320 mJ, the duration of the ablation is 60 s with 6 ns pulses at 20 Hz repetition rate. It has also been shown recently, that in the alkaline RONS enriched liquid the dissolution of ZnO NPs is retarded. Herein it is demonstrated, that the ZnO NPs embedded into alginate hydrosol are stable for months, as shown by the UV-VIS absorption spectra and photoluminescence emission of DIW and alginate based colloids, respectively, presented in the Figure below.

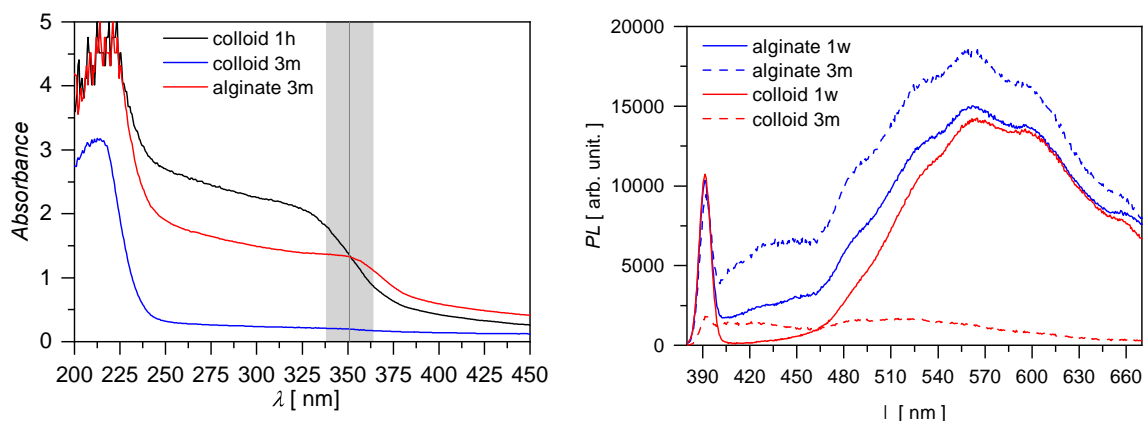

Acknowledgement: This work was supported by Hungarian NKFIH Science Funds K-132158.

[1] K. Kutasi, *et al. Plasma Sources Sci. Technol.*, **28**, 095010 (2019)

[2] K. Kutasi *et al. Plasma Process. Polym.*, **20**, 2200143 (2023)

[3] K. Kutasi *et al. J. Phys. D: Appl. Phys.* **57** 315201 (2024)



Oral

Atmospheric plasmas for depositing sulfonated plasma-polymerized films for use in liquid contacts

Nepal C. Roy¹, Elahe Naghdi², Güsta Irem Sakiz² Wim De Malsche², David Petitjean¹ and Francois Reniers¹

¹ *Chemistry of Surfaces, Interfaces and Nanomaterials (ChemSIN), Faculty of Sciences, Université libre de Bruxelles, Brussels 1050, Belgium*

² *Department of Chemical Engineering, μ Flow Group, Vrije Universiteit Brussel, 1050 Brussels, Belgium*

email: nepal.chandra.roy@ulb.be

The various forms of oxidized sulfur, such as sulfate (SO_4^{2-}), or sulfonic acid (SO_3H) group, exhibit surface functionalities, which are of interest to biomaterials, sensors, fuel cells, and ion exchange membranes for liquid separations^{1,2}. Sulfonated thin films are often deposited on porous membranes or polymer substrates for use in liquid-coating contact applications, rather than on smooth surfaces such as glasses, Si wafers, or metals. In the case of the application of the coatings in contact with liquids, the stability of the sulfonic groups (SO_3^-) in the plasma-polymerized coatings on Si wafers has never been realized^{2,3}.

This study investigates the stability of sulfonated coatings when exposed to liquids. Using dielectric barrier discharge (DBD) plasmas at atmospheric pressure, sulfonated coatings have been synthesized on Si wafers through a plasma polymerization process. As a precursor for the deposition of sulfonated plasma-polymerized coatings on Si wafers, a combination of "Acrylic Acid (AA)+ H_2SO_4 + Sulfur" is used. The stability of deposited coatings has been evaluated when in contact with an acidic (pH=5.5) buffer solution, they have found to have good adhesion to substrates, hydrophilicity and physical stability. X-ray photoelectron spectroscopy (XPS) and Fourier transform infrared spectroscopy (FTIR-IRRAS) have been used to evaluate the chemical stability, while profilometry was used to determine the film thickness (40-120 nm). As a result of both FTIR and XPS analysis, it is confirmed that the grafted functional groups, $\text{SO}_x(\text{H})$ and $-\text{COOH}$, could sustain in the coating after the flushing of buffer solution for 200 hours, though the atomic percentage of sulfur has been stabilized at 1.15 % compared to 3.25% prior to the flushing. Finally, compared to previously reported methods^{2,4}, this method is simple to set up, inexpensive, and capable of producing highly stable sulfonated coatings.

¹ B. Akhavan, K. Jarvis, and P. Majewski, *Langmuir* **30**(5), 1444–1454 (2014).

² D. Merche, C. Poleunis, P. Bertrand, M. Sferrazza, and F. Reniers, " *IEEE Trans. Plasma Sci.* **37**, 951–960 (2009).

³ A. Akram, M. Iqbal, A. Yasin, K. Zhang, and J. Li, *Coatings* **14**(2), (2024).

⁴ D. Merche, J. Hubert, C. Poleunis, S. Yunus, P. Bertrand, P. De Keyzer, and F. Reniers, *Plasma Processes and Polym.* **7**, 836–845 (2010).

Oral

Plasma-generated vacuum-UV radiation for inactivation of viruses in water

Mark Zver^{1,2*}, David Dobnik³, Rok Zaplotnik¹, Miran Mozetič¹, Arijana Filipič³, Gregor Primc¹

¹Department of Surface Engineering, Jozef Stefan Institute, Jamova cesta 39, 1000 Ljubljana, Slovenia

²Jozef Stefan International Postgraduate School, Jamova cesta 39, 1000 Ljubljana, Slovenia

³National Institute of Biology, Večna pot 111, 1000 Ljubljana, Slovenia

email: mark.zver@ijs.si

With an increasingly intense anthropogenic activity, it is becoming more difficult to ensure a safe supply of purified water. Standard water disinfection methods such as chlorination, filtration or UV radiation all have certain shortcomings related to their efficiency towards different contaminants, cost, and production of harmful by-products. Advanced oxidation processes rely on in-situ production of chemically reactive species, such as hydroxyl radicals (OH[•]), and have been gaining significant attention as a novel technique for water purification, since they react rapidly and indiscriminately against all organic contaminants. There are several methods for producing OH[•] radicals in water. One of which is by utilizing photons in the vacuum ultraviolet (V-UV) wavelength region (100–200 nm), which are energetic enough to break down water molecules into hydrogen and OH[•] radicals. However, their application to liquid water presents a technical limitation due to their interaction with various substances. Our study utilized a special, hermetically sealed chamber, with an MgF₂ window facing the low-pressure plasma radiation to treat water containing MS2 bacteriophages. By varying the applied power, gas inside the chamber, and the amount of V-UV exposure and OH[•] scavengers, we demonstrated that 1) V-UV intensity influences the efficiency of virus inactivation, 2) ozone is produced when air is present in the treatment chamber and, with the aid of UV radiation, decomposes to OH[•] radicals in water to contribute to the inactivation of viruses. With optimal treatment parameters, the technique could inactivate 9 log₁₀ viruses in under a minute. The study provided essential information for further understanding of such treatment approaches.

Acknowledgments:

The authors acknowledge the financial support from the Slovenian Research Agency (research core funding No. P2-0082) and research project No. L2-2617

Invited

Revealing nanoscale mechanism in the jumping crystals

Željko Skoko

*Department of Physics, Faculty of Science, Bijenička c. 32, Zagreb 10000, Croatia*email: zskoko@phy.hr

Thermosalient materials (colloquially known as “jumping crystals”) are a class of solid-state materials that exhibit mechanical motion, such as bending, twisting, or even jumping, when heated or cooled. These materials undergo solid-to-solid phase transitions when exposed to changes in temperature that involve a reorganization of the crystal lattice without melting, leading to a rapid release or absorption of mechanical energy. Jumping crystals are typically anisotropic which leads to differential expansion or contraction when the material undergoes a phase transition and customarily exhibit uni- or bi-axial negative thermal expansion. Due to their ability to produce rapid and significant mechanical movements they can be used as nanoscale actuators in microelectrochemical systems, temperature sensors, energy harvesting devices, smart materials and devices or for pharmaceutical and drug storage and delivery.

This fascinating phenomenon was comprehensively studied in the anticholinergic agent oxitropium bromide. The thermosalient effect, manifested in forceful jumps of up to several centimetres, was investigated by a combination of structural, microscopic, spectroscopic, and thermoanalytical techniques, providing data on which to base a proposed nanoscale mechanism for the phenomenon. Direct observation of the effect in a single crystal and structure determination of both phases revealed that the jumping of the crystals is a macroscopic manifestation of a highly anisotropic change in the cell volume characterized by the negative uniaxial thermal expansion. The cell distortion is accompanied by a conformational change of the oxitropium cation, which triggers increased separation between the ion pairs in the lattice at nearly identical separation between the cation and the anion within each ion pair. At the molecular level, the cation acts as a molecular shuttle composed of two rigid parts (epoxy-aza-tricyclic-nonyl portion and phenyl ring) that are bridged by a flexible ester linkage. The structure of the rigid, inert aza-tricyclic portion remains practically unaffected by the temperature, suggesting a mechanism in which the large, thermally accumulated strain is transferred over the ester bridge to the phenyl ring, which rotates to trigger the phase transition.

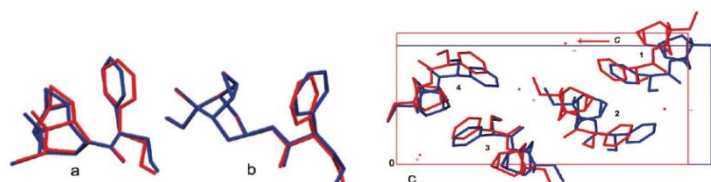


Fig 1. Structures of phase A (OXTBA, blue) and phase B (OXTB-B, red) of oxitropium bromide

1. Skoko, Ž. et al. *J. Am. Chem. Soc.* **2010**, 132, 14191
2. Skoko, Ž. et al. *J. Cryst. Growth* **2017**, 17, 4445

**Oral**

Radical-assisted covalent binding of biomolecules to amine plasma polymers

Lucie Janu¹, Beáta Beliančinová¹, Vinicius Tadeu Santana¹, Lizeth Katherine Tinoco Navarro¹, Petr Skládal², Lenka Zajíčková^{1,3}

¹ *Central European Institute of Technology – CEITEC, Brno University of Technology, Purkyňova 123, Brno 61200, Czech Republic*

² *Department of Biochemistry, Faculty of Science, Masaryk University, Kamenice 5, Brno 62500, Czech Republic*

³ *Department of Condensed Matter Physics, Faculty of Science, Masaryk University, Kotlářská 2, Brno 67737, Czech Republic*

email: lucie.janu@ceitec.vutbr.cz

Even though synthetic polymers are promising materials for bioapplications, lacking biocompatibility hinders their applicability. Coating such material with a thin film of plasma polymer (PP) containing polar groups increases the surface free energy, making the polymer hydrophilic. This facilitates immobilization of proteins or enzymes, as well as cell attachment and growth. Our previous publications showed that coating polycaprolactone nanofibers with amine PPs or carboxyl PPs with bound platelet-rich plasma highly improves cell viability [1, 2]. Immobilization of biomolecules is often mediated by chemical coupling through a linker to avoid nonspecific binding. However, recent studies [3] have shown that the deposition of amine PPs using enhanced ion bombardment produces a high number of free radicals, which are capable of covalently binding biomolecules to the PP surface without losing functionality. In this work, we proved abundant, long-lived radicals even for amine PPs prepared by a typical low-pressure plasma polymerization (with no additional ion bombardment). Although the radical density was the highest directly after the deposition, PPs preserved 60% of the original radical amount after 3 months of storage. The decrease was attributed to radical recombination in bulk or their diffusion to the PP surface, followed by reactions with adsorbed molecules. Interestingly, the radical density does not scale with the average discharge power but with the on-time power, and the deposition rate is similar during the off-time and on-time. It means that the radicals in the material grown during the off-time are created in the on-time because of the ion penetration effect. Finally, as proof of concept, we demonstrated a radical-assisted direct immobilization of a biomolecule, bovine serum albumin, to amine PP-coated quartz crystal microbalances.

[1] Nemcakova et al. *Int. J. Mol. Sci.*, (2020), 1-24, 21(24).

[2] Miroshnichenko et al. *Nanomaterials*, (2019), 9(4).

[3] Akhavan et al. *Appl. Mater. Today*, (2019), 456-473, 16.



Oral

Exploring the effects and stability of organic molecule modifications on CVD-synthesized monolayer MoS₂

Antun Lovro Brkić¹, Antonio Supina¹, Davor Čapeta¹, Lucija Dončević², Lucija Ptiček³, Šimun Mandić¹,
Livio Racané³, Ida Delač¹

¹ Center for Advanced Laser Techniques, Institute of Physics, Bijenička Cesta 46, Zagreb 10000, Croatia

² Division of Molecular Medicine, Ruđer Bošković Institute, Bijenička Cesta 54, Zagreb 10000, Croatia

³ Faculty Faculty of Textile Technology, University of Zagreb, Prilaz baruna Filipovića 28a, Zagreb 10000, Croatia

email: idelac@ifs.hr

Even though two-dimensional (2D) materials are promising candidates for the next generation of devices due to their unique properties, there are several issues that need to be addressed before these materials can be implemented in commercial devices. Firstly, precise and controlled synthesis and methods of manipulation are necessary for their successful integration, as well as the ability to fine tune the properties of interest like doping, band gap, or optical response. Several ways of tuning the properties of 2D materials are extensively researched, main ones being mechanical modulation and functionalization (e.g. with molecular patterning). In our research, we are interested in the modification of the 2D materials' properties by utilizing a layer of organic molecules.

Starting point of our research was the synthesis using chemical vapor deposition (CVD), transfer and characterization of monolayer MoS₂ samples. Next step was studying effects of prolonged exposure to ambient conditions and different solvents, in order to develop optimal procedures and to distinguishing the effects of the solvent from those of the organic molecules. Under the course of our research, we developed a simple method for modification of 2D materials by deposition of the organic molecule solution on the 2D material [1]. We further investigated the stability of our modified samples, as well as the reversibility of this modification. By analyzing the optical signatures of the samples using photoluminescence spectroscopy (PL), Raman spectroscopy, and surface quality using atomic force microscopy (AFM), we demonstrate that the modification of 2D MoS₂ with organic molecules leads to a stable surface modification that retains its optical signature, while heating of the modified samples restores their original optical signatures, indicating the re-establishment of the optical properties of the pristine MoS₂.

[1] A. L. Brkić et al., *Nanomaterials* **13**, 2115 (2023)

P1

ALD HfZrOx and InGaOx Thin Films for Flash Memory Application

Changhwan Choi¹, Boncheol Ku¹, Kyung Soo Park¹ and Hyun-Yong Yu²

¹ Division of Materials Science and Engineering, Hanyang University, Seoul 04763, Republic of Korea

² School of Electrical Engineering, Korea University, Seoul 02841, Republic of Korea

email: cchoi@hanyang.ac.kr

Flash memory device continuously needs high bit density with small footprint, and cost-effective process as technology node advances. Memory performance has been improved using adopting various materials and innovative device structure. However, there are still several challenges such as high operating voltage, low programming speed, and difficult cell size scaling, which requires alternative materials, device structures and advanced circuit design. Among alternative materials being investigated to replace the current charge trapping layer (Si_3N_4) and channel material (poly-Si), ferroelectric and oxide semiconductor materials have garnered a great interest. Ferroelectric thin film can be adopted due to scalability and operating power reduction compared to current $\text{SiO}_2/\text{Si}_3\text{N}_4/\text{SiO}_2$ (ONO) layer. In addition, oxide semiconductor thin film can be used as a channel materials thanks to high mobility and amorphous properties. Nonetheless, further research should be attempted before they are adopted in 3D flash memory device structure.

We demonstrated 3D vertical Gate-All-Around (GAA) vertical-channel FeFET using ferroelectric (FE) Zr-doped HfO_2 (HfZrOx) and indium-gallium oxide (InGaOx) channel. Subthreshold swing of 90 mV/dec, large memory window (MW) of 2.5V, 2 bits/cell, and reliable 10-years retention are reported. Our result indicate that ferroelectric and oxide semiconductor materials can be promising candidates to overcome the current ONO and poly-Si materials in 3D NAND flash memory device.

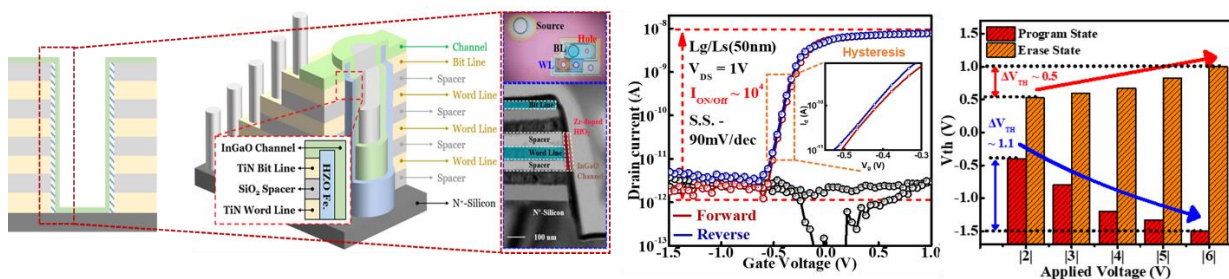


Figure: final 3D flash memory device structure, and their corresponding I-V, and memory characteristics

[Ref] B. Ku et al, International Memory Workshop (IMW), 2024



P2

Photocatalytic activity of TiO₂ thin films embedded with Cu nanoparticles prepared by atomic layer deposition technique

Robert Peter^{1,2}, Lucija Črep¹, Ivna Kavre Piltaver^{1,2}, Iva Šarić Janković^{1,2}, Daria Jardas Babić^{1,2}, Aleš Omerzu^{1,2}, Krešimir Salamon³, Ivana Jelovica Badovinac^{1,2}

¹ University of Rijeka, Faculty of Physics, Radmile Matejčić 2, 51 000 Rijeka, Croatia

² University of Rijeka, Center for Micro- and Nanosciences and Technologies, Radmile Matejčić 2, 51 000 Rijeka, Croatia

³ Rudjer Boskovic Institute, Bijenicka cesta 54, 10 000 Zagreb, Croatia

email: rpeter@uniri.hr

Among the various metal oxide semiconductors, titanium dioxide (TiO₂) has emerged as the most promising material for photocatalytic applications due to its excellent properties such as high chemical stability, non-toxicity, and suitable energy positions of the conduction and valence band edges. However, the biggest problem in the photocatalytic usage of TiO₂ is its wide band gap of about 3.2 eV, which limits the optical absorption in the material only to UV light. One of the methods to increase the photocatalytic efficiency of TiO₂ is to use metal nanoparticles coated on the surface, or embedded in the matrix of the semiconductor material. In this way, the absorption of visible light in the material is increased due to the effect of localized surface plasmon resonance in the metal nanoparticles. In this work, we have employed atomic layer deposition (ALD) method to synthesize a composite material consisting of Cu nanoparticles embedded in TiO₂ thin films. The concentration of Cu nanoparticles was controlled by the number of pulses of the copper precursor during the ALD growth of the material. The chemical composition of the Cu-TiO₂ thin films was determined by x-ray photoelectron spectroscopy (XPS), while the surface morphology of the samples was investigated in detail by scanning electron microscopy (SEM). In addition, the crystal structure of TiO₂ films embedded with Cu was determined by x-ray diffraction (XRD) measurements. Lastly, the photocatalytic efficiency of the ALD-grown samples was evaluated by monitoring the decomposition of methylene blue in aqueous solution under simulated solar irradiation. TiO₂ samples containing copper show an almost twofold increase in the photocatalytic activity, compared to pure TiO₂ films, demonstrating the highly beneficial effect of Cu nanoparticles on the applications of TiO₂ for organic dye degradation.

P3

High-Temperature Tribology of Multilayered CrN/(Cr,V)N/VN Protective Coatings

Domen Korbar^{1,2}, Aljaž Drnovšek¹, Sandra Drev³, Miha Čekada¹

¹ *Jožef Stefan Institute, Department of thin films and surfaces, Jamova 39, Ljubljana 1000, Slovenia*

² *Faculty of Natural Sciences and Engineering, University of Ljubljana, Aškerčeva cesta 12, Ljubljana 1000, Slovenia*

³ *Jožef Stefan Institute, Centre for Electron Microscopy and Microanalysis, Jamova 39, Ljubljana 1000, Slovenia*

email: aljaz.drnovsek@ijs.si

With the advancement of modern high-speed machining and molding technologies, there is a growing demand for protective hard coatings that exhibit excellent tribological performance across various temperatures. CrN coatings pose high oxidation resistance, anti-corrosive and anti-adhesive properties. However, CrN coatings still face challenges due to relatively low hardness and poor tribological performance. Combining CrN with other nitrides via solid solution or multi-layering has proven to be an effective strategy to improve these properties. Recently, VN has attracted increasing interest because it quickly oxidizes to form Magnéli-phase vanadium oxides, which have easy slipping shear planes and low melting point, thus becoming lubricious under stress and high temperature.

To study tribological properties at elevated temperatures, we deposited multilayered CrN/(Cr,V)N/VN coatings. All the coatings in our study were deposited using an industrial DC-magnetron sputtering system. We used two triangle-like segmental Cr/V targets, one chromium, and one vanadium target. This unique setup allowed us to produce coatings with different Cr and V concentrations in a single deposition process by placing samples on different heights of the vertical axis in the chamber. Ball-on-disk tests were performed on a high-temperature tribometer at room temperature, 300, 600, and 700 °C. Results show a decrease in friction coefficient at maximum temperature. These coatings' mechanical and structural properties before and after the tribological tests were studied using nanoindentation, SEM, and TEM.

Pressure dependent nonlinear spectral broadening of ultrashort laser pulses in hollow-core fiber (HCF)

Vedran Brusar¹, Nikola Gredičak¹, Silvije Vdović¹

¹ *Institute of Physics, Bijenička Cesta 46, Zagreb 10000, Croatia*

email: vbrusar@ifs.hr

Hollow-core fibers (HCFs) are a remarkable type of optical fiber that have significantly transformed light transmission and control in various photonic applications. Unlike traditional optical fibers that guide light through a solid glass core, HCFs utilize a hollow core, surrounded by a microstructured cladding. This distinctive structure greatly reduces the interaction between light and the fiber material, allowing for exceptionally low-loss light transmission, particularly at wavelengths where conventional fibers typically face challenges due to absorption and scattering. The use of hollow-core fibers with laser pulses has opened new frontiers in fields such as high-power laser delivery, nonlinear optics, and ultrafast pulse propagation.

Manipulation of ultrashort pulses can be achieved by pulse propagation through the fiber core in vacuum conditions or through a noble gas-filled core. High pulse energies, noble gas characteristics, and the geometry of the fiber core can lead to a series of nonlinear effects such as self-phase modulation and four-wave mixing that change the spectrum of the pulse. We aim to utilize modified laser pulses in ultrafast spectroscopy techniques such as femtosecond transient absorption (fs-TA) and two-dimensional electronic spectroscopy (2DES), where the spectrum of the pulse, and consequently the pulse duration, play a crucial role. Here, we investigate the spectral and temporal characteristics of pulses propagated through HCF using the Frequency-Resolved Optical Gating (FROG) technique, depending on noble gas pressure and incident pulse energies. Using an optical compressor, we managed to compress pulses propagated through the fiber to a pulse duration of less than 15 fs.

P5

Monolayer MoS₂ growth on a pre-patterned substrate as a way to induce strain

Karmen Kapustić¹, Cosme Gonzáles Ayani¹, Šimun Mandić¹, Ana Senkić¹, and Iva Šrut Rakić¹

¹ Centre for Advanced Laser Techniques, Institute of Physics, Bijenička cesta 46, Zagreb 10000, Croatia

email: isrut@ifs.hr

Investigating strain in two-dimensional (2D) materials is particularly compelling due to its potential to modify their lattice constants, lattice vibrations, thermal conductivity, electronic and optical properties, as well as their chemical reactivity and overall device performance. However, the field of "straintronics" faces significant challenges. Most research relies on spatially averaging techniques that fail to provide insights into local mechanical and electronic properties. Additionally, creating crystallographically precise, tunable strain and forming narrow strain-induced junctions for nanoscale device applications remain formidable tasks.

To address these challenges and systematically explore the effects of strain on specific 2D materials and their heterostructures, we have developed a novel approach. We grow monolayer transition metal dichalcogenides on pre-patterned, stepped substrates, where the 2D material bends over step edges. This method enables precise control over the crystallographic direction of applied strain and facilitates the formation of sharp lateral junctions with finely tuned band gaps and work function variations. As a case study, we present the synthesis of monolayer MoS₂ on a graphene-covered Ir(332) substrate using molecular beam epitaxy (MBE) under ultra-high vacuum (UHV) conditions. Scanning tunneling microscopy (STM) and Atomic force microscopy (AFM) topography images confirm the successful growth of MoS₂ islands on the gr/Ir(332) substrate, with individual islands seamlessly traversing multiple step edges and bending accordingly. Further characterization using Kelvin probe force microscopy (KPFM), nano Fourier transform infrared spectroscopy (nano-FTIR), and Raman spectroscopy reveals the presence of strain within the system and significant changes in work function induced by MoS₂. This work highlights a successful bottom-up approach for structurally modifying and straining 2D materials, with promising implications for future applications in nanoscale devices.

Keywords: 2D materials, MoS₂, MBE growth, intercalation, AFM imaging

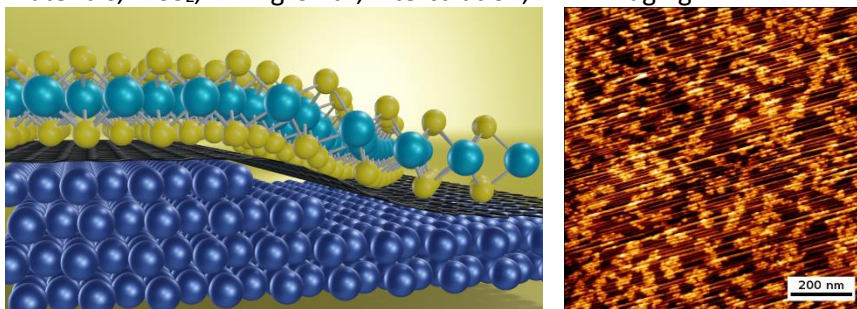


Figure 1. Left, a model of MoS₂ island covering atomic steps present on gr/Ir(332) substrate, right, an AFM topography of a MoS₂/gr/Ir(332) sample.



P6

Characterization of Alumina Scales on Fe-Al Alloys: Enhancing High-Temperature Hydrogen Permeability Resistance

Andrea Jurov¹, Andreja Šestan¹, Janez Zavašnik^{1,2}, Vincenc Nemanič¹

¹ *Institute Jožef Stefan, Jamova cesta 39, Ljubljana 1000, Slovenia*

² *Max-Planck-Institut für Eisenforschung GmbH,
Düsseldorf, Germany*

email: andrea.jurov@ijs.si

Binary Fe-Al alloys are pivotal high-temperature structural materials known for their outstanding corrosion and wear resistance. Their reduced weight compared to structural steels makes them attractive for various applications. A key feature of these alloys is the formation of a protective alumina (Al_2O_3) scale on the surface when exposed to oxygen-rich environments, which significantly enhances their performance. This study focuses on the characterization of alumina scales formed on a Fe_{32.5}Al alloy, particularly in the context of their impact on hydrogen permeability.

The investigation began with a Fe_{32.5}Al cast sample, which was oxidized in a controlled oxidative environment and heated to 500°C. Initially, a thin oxide layer (~1.5 nm) was formed during thermal treatment in high vacuum, as estimated from XPS analysis. This initial layer showed a slight reduction in hydrogen permeation. Subsequent oxidation in pure oxygen at 500°C resulted in a denser, more impermeable oxide layer (~5 nm), achieving a Permeation Reduction Factor (PRF) >1000, marking the lowest effective permeability ever recorded on a metal substrate at 400°C.

Characterization techniques such as XPS and SEM were employed to analyze the composition and morphology of the alumina scales. The results revealed that the initial oxide layer was amorphous, while the oxide formed at 500°C was highly crystalline, indicating a phase transformation to $\alpha\text{-Al}_2\text{O}_3$. This transformation is significant for the material's permeability properties, as the dense crystalline alumina layer provides an effective barrier against hydrogen permeation.

The findings underscore the importance of controlled oxidation processes in developing alumina scales with optimal protective properties. By achieving a dense and crystalline alumina layer, Fe-Al alloys can be enhanced for high-temperature applications, combining lightweight characteristics with superior resistance to hydrogen permeation. This study provides critical insights into the interplay between material characterization and functional performance, paving the way for advanced applications of Fe-Al alloys.

Acknowledgement: Slovenian Research and Innovation Agency (ARIS), research core funding P1-0417, Research project no. J2-440.



P7

High resolution, compact Raman spectrometer based on CMOS camera

Davor Čapeta¹, Mario Rakić¹, Goran Zgrablić¹

¹ *Institute of Physics, Bijenička Cesta 46, Zagreb, Croatia*

email: dcapeta@ifs.hr

We present a Raman spectrometer that reaches spatial resolution of $<1 \mu\text{m}$ (dependent on the focusing objective); is cost-effective and provides high spectral resolution of 2.6 cm^{-1} . Good performance has been achieved by use of high grade optical components for Raman beam coupling to the entrance slit of the spectrometer, and later, and the choice of an industrial-grade uncooled CMOS camera as detector. The camera has good quantum efficiency ($\sim 70\%$) and low readout noise. The drawback of using uncooled camera is that the integration time is limited to less than 10s due to higher dark current. Moreover, by characterization with the 2D MoS₂ samples, we have demonstrated the spectrometer has throughput and resolution comparable to research-grade confocal Raman microscopy systems. The reduction of cost and size compared to research-grade commercial devices will enable an even wider spread of Raman spectroscopy for real time monitoring of chemical reactions or deposition processes.

Determination of dielectric functions of colloidal silver nanoparticles in LSPR relevant wavelength range

Julio Car¹, Nikša Krstulović¹

¹Centre for Advanced Laser Techniques (CALT),
Institute of Physics, Bijenička Cesta 46, Zagreb 10000, Croatia

email: jcar@ifs.hr

Importance of dielectric functions in context of interaction of light with nanoscale matter is huge since they govern all optical properties [1]: dispersion, absorption, scattering, reflection, transmittance, polarization etc. In this work, the method for extraction of dielectric functions from UV-Vis spectra of colloidal silver nanoparticles is presented as a bypass to standard experimental techniques like ellipsometry [2] in constrained wavelength range [400..600] nm. The approach is based on developed Mie scattering fitting function with additional conditions on dielectric functions behaviour at localized surface plasmon resonance wavelength (LSPR) [3]. It allows extraction of universal dielectric functions which are valid for *a priori* unknown sizes of silver nanoparticles in diameter range [20..100] nm as well as dielectric functions of fixed size silver nanoparticles. Once known, these dielectric functions can be used for direct fit of UV-Vis spectra to determine size and consequently concentration of colloidal silver nanoparticles. The obtained results allow qualitative insights into electronic structure and dynamics of electronic motion in silver nanoparticles under influence of external EM field [4].

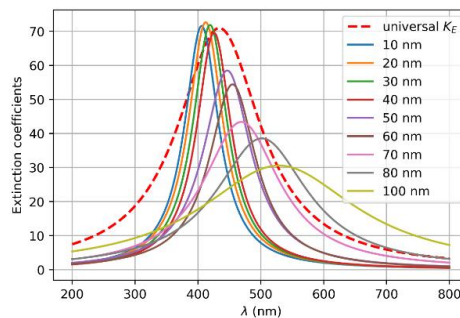


Figure 1. Mie extinction coefficients $K_E(\lambda)$ for monodisperse colloidal silver nanoparticles in size range [10..100] nm. Dashed curve shows universal $K_E(\lambda)$ which substitutes all other curves in fitting function for UV-Vis spectra.

- [1] D. J. Fabian, *Solid-state spectroscopy*, vol. 285, no. 5761. 1980.
- [2] H. U. Yang, J. D'Archangel, M. L. Sundheimer, E. Tucker, G. D. Boreman, and M. B. Raschke, "Optical dielectric function of silver," *Phys. Rev. B - Condens. Matter Mater. Phys.*, vol. 91, no. 23, 2015, doi: 10.1103/PhysRevB.91.235137.
- [3] J. Car and N. Krstulović, "Fitting Procedure to Reconstruct the Size Distribution and the Concentration of Silver Colloidal Nanoparticles from UV-Vis Spectra," *Nanomaterials* 2022, 12, 3302. <https://doi.org/10.3390/nano12193302>
- [4] Y. He and T. Zeng, "First-principles study and model of dielectric functions of silver nanoparticles," *J. Phys. Chem. C*, vol. 114, no. 42, pp. 18023–18030, 2010, doi: 10.1021/jp101598j.



P9

Effect of Sputtering Power on Low Concentration Impurities in Binary Oxides for Semiconductor Applications : A ToF-ERDA Characterization Study

Filip Ferencík¹, Jozef Dobrovodský¹, Zoltán Száraz¹, Pavol Noga¹

¹ *Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology in Trnava, Advanced Technologies Research Institute, J. Bottu 25, Trnava.*

email: filip.ferencik@stuba.sk

The performance of semiconductors is heavily influenced by impurity concentrations. Power density is one of sputtering parameters that significantly affects these impurities. Higher power density reduces the amount of contaminants in the thin film. This study looks at how power density in magnetron sputtering impacts hydrogen, carbon, and other impurities in silicon, titanium, copper, silver, and palladium binary oxides, which are common in the semiconductor industry.

We focused on a narrow power density range of 200-300W using DC reactive magnetron sputtering on a 3-inch target. Six samples of each material were prepared under fixed conditions of $5 \cdot 10^{-3}$ mbar pressure in an Argon and Oxygen atmosphere with a flow rate of 40/10 sccm. Data analysis was done on films of the same thickness, ignoring the surfaces of both the substrate and the film.

Using Time-of-Flight Elastic Recoil Detection Analysis (ToF-ERDA), we could detect very low but important changes in impurity concentrations and understand how they relate to the sputtering power density. This detailed investigation into low impurity levels has not been done to this depth before. The results offer new insights into optimizing deposition parameters to improve film purity and performance.

The Slovak Research and Development Agency, grant No. APVV-20-0220.



P10

Low-energy ion bombardment induced reduction of TiO₂ grown by Atomic Layer Deposition

Iva Šarić Janković^{1,2}, Robert Peter^{1,2}, Krešimir Salamon³, Ivna Kavre Piltaver^{1,2}, Antonio Borzatti¹,

Mladen Petravić¹

¹ University of Rijeka, Faculty of Physics, Radmile Matejčić 2, Rijeka 51000, Croatia

² University of Rijeka, Center for Micro and Nano Sciences and Technologies, Radmile Matejčić 2, Rijeka 51000, Croatia

³ Ruđer Bošković Institute, Bijenička cesta 54, Zagreb 10000, Croatia

email: iva.saric@uniri.hr

Titanium dioxide (TiO₂) is one of the most studied photocatalytic materials, known for its numerous advantages over other semiconductor materials, such as chemical stability, non-toxicity, biocompatibility, and availability. Recent research has demonstrated that structural defects in TiO₂ significantly affect its physical and chemical properties. These include electrical, optical, and mechanical characteristics, its reactivity, surface chemistry, and the ability to participate in chemical reactions. Oxygen vacancies are the most significant defects in TiO₂, making the controlled creation of these point defects a common technique for modifying its properties. Low-energy ion bombardment is a frequently employed approach for introducing structural defects in metal oxides and creating new structural and chemical phases and nanostructured surfaces [1, 2].

In this study, the anatase TiO₂ thin films synthesized by Atomic Layer Deposition (ALD) were modified by the low-energy H₂⁺ and Ar⁺ ion bombardment at room temperature. The bombardment was carried out inside an ultra-high vacuum chamber of an X-ray Photoelectron Spectroscopy (XPS) instrument. The impact of ion bombardment on the chemical composition of TiO₂ surfaces as a function of bombardment time was assessed by measuring photoemission spectra around the Ti 2p and O 1s core-levels, and the valance band. The relative fractions of chemical states of Ti and O atoms as a function of bombardment time were determined from the numerical deconvolutions of the corresponding photoemission lines. Secondary Ion Mass Spectrometry (SIMS) was employed for in-depth elemental analysis and film thickness measurements. In addition, the crystalline structure of the surface region of the irradiated films was determined by Grazing Incidence X-ray Diffraction (GIXRD), while the impact of ion bombardment on the surface morphology and film thickness was studied with Scanning Electron Microscopy (SEM). The observed differences in oxide reduction kinetics under Ar⁺ and H₂⁺ ion bombardment are explained, on one hand, by the high preferential sputtering under Ar bombardment and, on the other, by the high chemical reactivity of hydrogen.

[1] M.I. Nandasiri *et al.*, Instability of Hydrogenated TiO₂, J. Phys. Chem. Lett., 6 (2015) 4627-4632.

[2] B.M. Pabón *et al.*, Formation of titanium monoxide (001) single-crystalline thin film induced by ion bombardment of titanium dioxide (110), Nat. Commun., 6 (2015) 6147.

P11

Visualizing intercalation of 2D material using AFM based techniques: MoS₂ on graphene/Ir(111) case study

Karmen Kapustić¹, Cosme González Ayani¹, Borna Pelić², Kateřina Plevová³, Šimun Mandić¹, Iva Šrut Rakić¹

¹ Center of Excellence for Advanced Materials and Sensing Devices, Zagreb, Croatia

² Department Physik, Universität Siegen, Siegen, Germany

³ Department of Polymer Engineering and Science, Montanuniversitaet Leoben, Leoben, Austria

email: kkapustic@ifs.hr

Two-dimensional (2D) materials, especially transition metal dichalcogenides (TMDs), exhibit remarkable physical properties such as 2D superconductivity, magnetism and bandgaps tunable via functionalization, strain, and substrate interactions [1]. Intercalation, particularly self intercalation, influences TMD-substrate interactions, altering their electronic structure [2]. While scanning tunneling microscopy (STM) offers atomically resolved insights, it is limited in scan area and requires ultra-high vacuum conditions. We demonstrate that atomic force microscopy (AFM) with its advanced optical and electrical modes can be used as a method to visualize local intercalation on a larger scale. This capability is showcased using molybdenum disulfide (MoS₂) grown on top of graphene (Gr) on Ir(111) substrate. MoS₂ islands exhibit distinct coalesced morphology and lower coverage near graphene wrinkles due to sulfur intercalation which weakens the MoS₂-Gr interaction. AFM phase imaging reveals noticeable contrast around wrinkles, quantitatively confirmed by a local drop in Young's modulus. Kelvin probe force microscopy (KPFM) maps out intercalated areas based on intercalation induced local changes in electronic structure of both Gr and MoS₂ [2], likely causing observed variations in the work function in the vicinity of wrinkles. Photo-induced force microscopy (PiFM) further delineates intercalated regions in this 2D heterostructure. Our results show the versatility of AFM based techniques in visualizing atomic-scale phenomena and emphasize the importance of micrometer scale imaging techniques for studying materials grown by molecular-beam epitaxy (MBE).

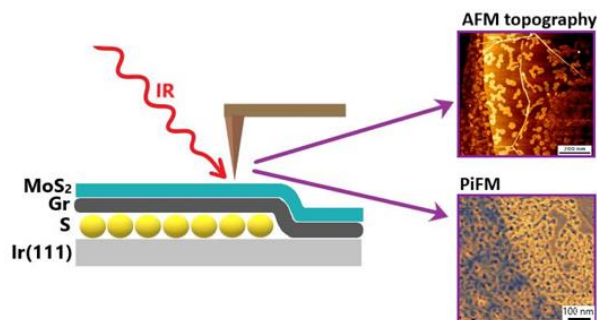


Figure 1. A schematic illustration of MoS₂/Gr/Ir(111) heterostructure partially intercalated with Sulphur, alongside the representative AFM topography and PiFM image.

[1] Monga, D., et al. Materials Today Chemistry 2021, 19, 100399.

[2] Pelić, B., et al. Tailoring the intrinsic interactions in a two-dimensional multivalley semiconductor by self-intercalation. npj 2D Materials and Applications Journal Specifications (accepted for publication).

P12

UV and solar-driven photocatalysis of organic dyes using ZnO-Ag heterojunction nanoparticles synthesized by one-step laser synthesis in water

Rafaela Radičić¹, Andrea Jurov², Janez Zavašnik², Janez Kovač³, Vedran Brusar¹, Silvije Vdović¹, Dino

Novko¹, Nikša Krstulović¹

¹ Centre for Advanced Laser Techniques, Institute of Physics, Bijenička cesta 46, 10000 Zagreb, Croatia

² Department of Gaseous Electronics, Jožef Stefan Institute, Jamova cesta 39, 1000 Ljubljana, Slovenia

³ Department of Surface Engineering, Jožef Stefan Institute, Jamova cesta 39, 1000 Ljubljana, Slovenia

email: niksak@ifs.hr

In this research, ZnO-Ag heterojunction nanoparticles (NPs) were obtained with a novel one-step pulsed laser ablation (PLA) synthesis technique [1]. ZnO-Ag NPs were obtained by simultaneously ablating ZnO and Ag targets in water using a pulsed Nd:YAG laser, achieving facile and clean synthesis. The PL spectra show that ZnO-Ag NPs have a lower recombination rate of the $e^- - h^+$ pairs, implying a higher photocatalytic activity. The photocatalytic efficiency of ZnO-Ag NPs was carried out under UV and solar irradiation against Methylene Blue, Rhodamine B, Crystal Violet, and Methyl Orange dyes. It was confirmed that the presence of Ag increases the photocatalytic efficiency against all studied pollutants due to the prolonged charge separation and the existence of localized plasmon surface resonance which enables solar-driven photocatalysis. Ultrafast transient absorption spectroscopy was employed to understand the charge carrier's photoexcitation process involved in the ZnO-Ag NPs photocatalytic route under the influence of visible irradiation. This research demonstrates a simple one-step synthesis of Ag-ZnO heterojunctions via the PLAL method for efficient solar-driven photocatalysis against various organic pollutants.

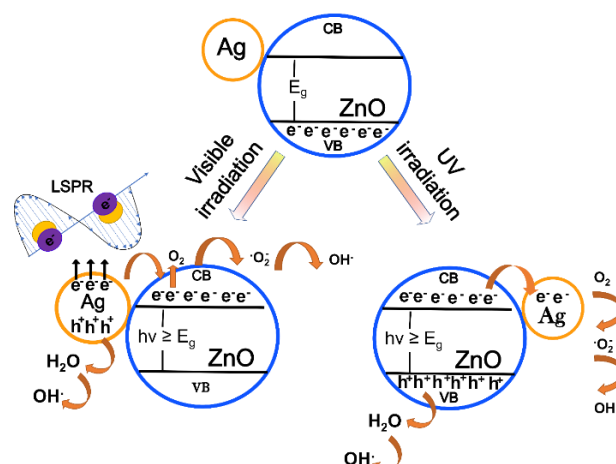


Figure 1. Schematic illustration of ZnO-Ag photodegradation mechanism under UV and visible irradiation.
[1] R. Radičić et al. Appl. Surf. Sci. 669 (2024) 160498

P13

Application of electrochemical impedance spectroscopy in studying the mechanism of metal oxide nanoparticles used in ion-selective electrodes

Karolina Pietrzak¹, Julio Car¹, Rafaela Radičić¹, Cecylia Wardak², Niksa Krstulović¹

¹Centre for Advanced Laser Techniques, Institute of Physics, Bijenička 46, Zagreb 10000, Croatia

²Institute of Chemical Sciences, MCSU, Maria Curie-Skłodowska Sq. 3, 20-031 Lublin, Poland

email: kpietrzak@ifs.hr

In recent years, metal and metal oxide nanoparticles (MONPs) have gained huge popularity among scientists who are still developing new methods of obtaining them and looking for new areas of application. One of applications is using the nanoparticles in the construction of electrochemical sensors. The research of ion-selective electrodes with solid contact (SCISEs) as a layer of MONPs (copper, iron and zinc oxides) were conducted, while electrochemical impedance spectroscopy (EIS) method was used to examine their electrical parameters.

The EIS is becoming increasingly popular and is mainly used as a tool for studying the electrical and electrochemical properties of materials and systems. It consists in applying an electrical impulse (of known intensity or voltage) to the tested electrodes and observing the obtained response. EIS enables the separation and characterization of kinetic processes occurring in different electrochemical systems. In relation to ISEs, it is a fast and convenient method that allows for the study of charge transfer kinetics at the interface between the ISM and the internal electrode. It allows for the optimization, characterization and monitoring work of ISM, and also determination of many parameters, such as double layer capacitance or bulk membrane and charge transfer resistance. Moreover, thanks to using this method, it is possible to determine whether the tested sensors are still working properly or need additional calibration.

The obtained results allowed to prove that the presence of the MONPs intermediate layer in the SCISEs construction caused a decrease in the bulk resistance of the membrane and an increase in the capacitance of the double layer. The charge transport across the interface was also faster and easier, what resulted in better potential stability and increased durability of the electrodes over time [1].

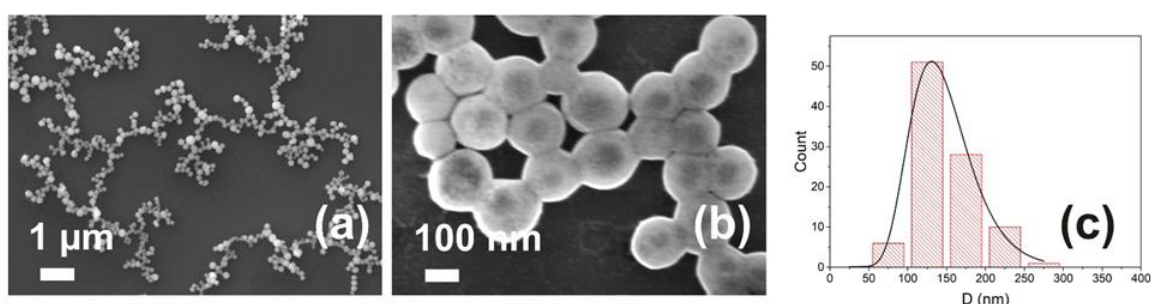


Fig. SEM images of ZnONPs (a,b) with corresponding size-distribution (c).

[1] K. Pietrzak, N. Krstulović, D. Blažeka, J. Car, S. Malinowski, C. Wardak, Metal oxide nanoparticles as solid contact in ion-selective electrodes sensitive to potassium ions, *Talanta* 243 (2022) 123335



P14

High entropy nitrides: High temperature study of Cr–Hf–Mo–Ta–W–N thin films

Šárka Zuzjaková¹, Stanislava Debnárová², Matej Fekete², Petr Zeman¹, Pavel Souček²

¹ *Department of Physics and NTIS – European Centre of Excellence, University of West Bohemia, Univerzitní 8, 301 00 Plzeň, Czech Republic*

² *Department of Plasma Physics and Technology, Faculty of Science, Masaryk University, Kotlářská 2, 611 37 Brno, Czech Republic*

email: sazuz@kfy.zcu.cz

In general, high entropy alloys (HEAs) are multicomponent materials containing at least five principal elements. The research on HEAs has also been extended to cover multicomponent ceramics, such as oxides, nitrides, carbides, and borides, due to their promising properties. High entropy ceramics can exhibit very good mechanical properties at low as well as high temperatures, outstanding structural stability, and high oxidation resistance. This makes them promising candidates for next-generation replacements of traditional materials in many areas of the industry.

In present study, we focused on the structure and properties of high entropy nitrides (HENs) from the Cr–Hf–Mo–Ta–W system. Cr–Hf–Mo–Ta–W–N films were prepared by magnetron sputtering at ambient temperature and at elevated temperature of 700°C. During deposition, the nitrogen flow was fixed to 20 sccm, while the target composition was changed in order to prepare films with a wide range of the elemental compositions. The nitrogen content in the films was in the range of 35 – 52 at.%, and the content of metals in the films was changing in a wide range. After deposition the elemental composition, structure and mechanical properties were investigated. Subsequently, the films were annealed in a vacuum to temperatures up to 1200°C and after cooling down to room temperature the structure and mechanical properties were examined.

It was found that appropriate deposition conditions result in the preparation of HEN films with a simple FCC structure given by the employed elements typical for high entropy nitrides. High hardness of 20 GPa of these films in the as-deposited state was retained even after annealing to 1200°C in a vacuum. Changes in the structure after annealing will also be discussed.

P15

Structural investigation of the heat-treated Ti/Al/TiN/Au contact layer on n-GaN - role of TiN

Zs Fogarassy¹, A Wójcicka², I Cora¹, A S Rącz¹, S Grzanka³, E Dodony¹, P Perlin⁴, M A Borysiewicz²

¹ HUN-REN Centre for Energy Research, Institute for Technical Physics and Materials Science, Budapest, Hungary

² Łukasiewicz Research Network – Institute of Microelectronics and Photonics, Warsaw, Poland

³ TOP-GAN, Warsaw, Poland

⁴ Institute of High Pressure Physics, Polish Academy of Sciences, Warsaw, Poland

email: fogarassy.zsolt@ek.hun-ren.hu

In this work, we present the structure of the conventionally used Ti/Al/TiN/Au/n-GaN contact layer as a result of heat treatment for different TiN thicknesses. The Ti/Al/TiN/Au contact layer is the standard ohmic contact to n-type GaN. The ohmic character of the Ti/Al/TiN/Au/n-GaN junction can be achieved after heat treatment at 700°C in nitrogen. The complex layer system formed as a result of heat treatment has been investigated in numerous studies. However, commonly while analyzing XRD patterns of the junction, the possibility that the TiN layer would not act as a diffusion barrier in case of heat treatment above 500°C is not taken into account. Hence the XRD peaks have been usually explained by the formation of Al-Ti alloy layers. In the publications in which TEM investigations were also performed, heat-treated layers without an Au layer were generally examined, so the role of Au could not be explored. Our TEM investigations showed that in fact TiN does not act as a diffusion barrier layer in a full ohmic contact stack and that both Au and Al diffuse through it, as shown in Figure 1, which illustrates the diffusion processes. Additionally, we show that N leaves GaN enabling the formation of AlN and TiN layers on the surface of GaN. In addition, an Au₂Al alloy layer is also formed and a spinel-type Al_{2.67}O₄ phase can be observed on the surface of the sample, which can cause roughening of the surface.

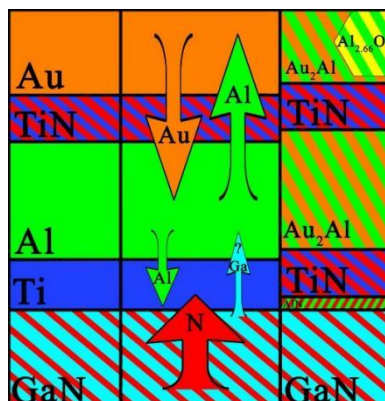


Figure 1. Diffusion processes during heat treatment. [1]

[1] Zs Fogarassy, A Wójcicka, I Cora, A S Rącz, S Grzanka, E Dodony, P Perlin, M A Borysiewicz, Materials Science in Semiconductor Processing Open Access Volume 1751, 2024, 108250

P16

On the challenges in reactive HiPIMS co-sputtering of Y and Ti for oxide layers

Miklós Serényi¹, Dániel Olasz^{1,2}, György Sáfrán¹

¹*Institute for Technical Physics and Materials Science, HUN-REN Centre for Energy Research, Konkoly-Thege Miklós út 29-33, Budapest 1121, Hungary*

²*Department of Materials Physics, Eötvös Loránd University, Pázmány Péter sétány 1/A, Budapest 1117, Hungary*

email: serenyi.miklos@ek.hun-ren.hu

Reactive HiPIMS (High-power impulse magnetron sputtering) is a sophisticated technique that requires precise tuning of several sputtering parameters (e.g. sputtering power, pulse length and frequency, reactive gas partial pressure, pumping speed, etc.) to achieve stable layer growth. In the case of co-sputtering of two targets (yttrium and titanium) – which exhibit completely different behaviour in reactive environments (secondary electron emission increases for YO_y , while decreases for TiO_y) – this seems a great challenge. The first trial was to set the most critical parameter (the O_2 gas pressure). In order to do this, the hysteresis behaviour of reactive sputtering was investigated and the oxygen flow rate was optimized separately for Y and Ti , to achieve a stable plasma and reasonable sputter rate for both cases. During the co-sputtering, the reactive gas inlet was pulsed with a chopping time of about ten seconds.

Another challenge is to control the $Y-Ti$ composition of the deposited layer. For non-reactive sputtering this can be done simply by tuning the power on each target, but in the reactive case it would upset the delicate balance of the system. By varying the number of pulses in the burst applied on the two targets, the desired change in layer composition was achieved. By using the above mentioned techniques and the micro-combinatorial one [1] we could produce a combinatorial $Y-Ti-O$ sample in which the $Y-Ti$ ratio varied laterally over a wide range. Figure 1a shows the photograph of the HiPIMS chamber during the sputtering process, while Figure 1b shows the resulting combinatorial $Y-Ti-O$ layer on a Si wafer, which exhibits a lateral composition gradient.

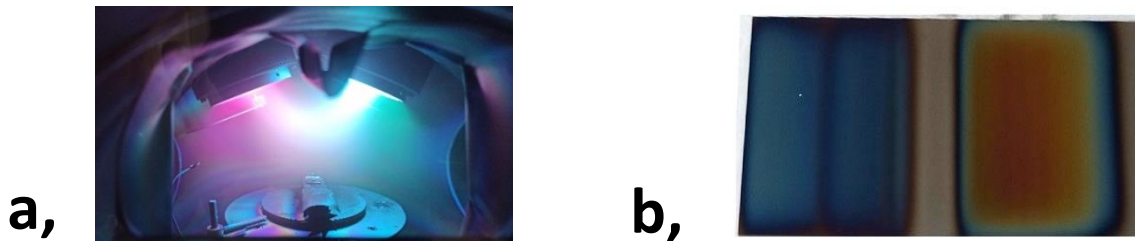


Figure 1: **a**, Reactive burst HiPIMS sputtering of Y (left) and Ti (right) **b**, resulting combinatorial $Y_xTi_{1-x}O_y$ sample

[1] Sáfrán G. et al. *Materials* **2023**, 16, 3005. <https://doi.org/10.3390/ma16083005>

P17

Advanced structural characterization of Gallium Oxide by transmission electron microscopy

Ildiko Cora¹, Zsolt Fogarassy¹, Matteo Bosi², Roberto Fornari^{2,3}, Alexander Azarov⁴, Andrej Kuznetsov⁴, Béla Pécz¹

¹ HUN-REN Centre for Energy Research, Institute of Technical Physics and Materials Science, Budapest 1121, Hungary

² IMEM-CNR, Viale delle Scienze 37/A, 43124 Parma, Italy.

³ Department of Mathematical, Physical and Computer Sciences, University of Parma, Viale delle Scienze 7/A, 43124 Parma, Italy
4IMEM-CNR, Parma, Italy

⁴ University of Oslo, Department of Physics, Centre for Materials Science and Nanotechnology, PO Box 1048 Blindern, N-0316 Oslo, Norway

email: cora.ildiko@ek.hun-ren.hu

Intrinsic properties of Ga₂O₃ makes it a promising candidate for high power electronics, suitable for fabrication of solar-blind detectors for UV-C radiation.

Beside the stable monoclinic β , other polymorphs (α , γ , $\kappa(\epsilon)$, δ) are relevant candidates for applications. The most crucial step in developing devices is the structural characterization of the polymorphs: understand their detailed crystal structure, growth mechanism, thermal stability and phase transformations up to 900°C, and the structural relationship between polymorphs at the atomic scale. Atomic scale study of these can be achieved by conventional and scanning transmission electron microscopy combined with elemental mapping and image simulations. In situ TEM annealing is an adequate method to study transformations alive.

In our work we would like to present five polymorph transformations were studied by us applying *ex-situ* and *in situ* TEM heating measurements. The $\kappa \rightarrow \beta$ transformation was crystallographically described *in situ* in the microscope under vacuum, and using differential scanning calorimetry. The $\kappa \rightarrow \gamma$ transformation was also studied with *ex-situ* heating measurement on a κ -Ga-oxide thin film, where the role of O₂ fugacity of heating measurements on transformation of κ structure was discovered and the interfaces between κ/β and κ/γ were modelled. Our second group of TEM experiments were carried out on radiation induced phase transformation of β -Ga₂O₃. First, the $\beta \rightarrow \gamma$ phase transformation was crystallographically described. Later the structural and textural development of the $\gamma \rightarrow \beta$ transformation was monitored by *ex situ* heating (series of samples at different temperatures from RT up to 1100°C) and *in situ* TEM annealing experiments. The experimental data were excluded by simulations using JEMS software applying multislice approach for TEM image simulations.



Poster session 2

P1

PET surfaces treated with atmospheric pressure plasma jet and enhanced with ZnO nanoparticles: characterization and antibacterial activity

Lucija Krce¹, Rafaela Radičić², Marija Bačeković Koloper¹, Ivana Weber¹, Nikša Krstulović²

¹ *University of Split, Faculty of Science, Rudera Boskovicica 33, Split 21000, Croatia*

² *Centre for Advanced Laser Techniques, Institute of Physics, Bijenička cesta 46, Zagreb 10000, Croatia*

email: lkrc@pmfst.hr

The development of new technologies to prevent bacterial growth on surfaces without promoting bacterial resistance is crucial in the fight against microbial contamination. Polyethylene terephthalate (PET), one of the most common thermoplastic polymers, is widely used in the food and beverage packaging industry, making it an excellent candidate for safe-by-design surface modification that promotes antibacterial activity. The use of modified bioactive PET surfaces could extend product shelf life while reducing waste production.

In the present study, PET surfaces were subjected to atmospheric pressure plasma jet treatment and enhanced with ZnO nanoparticles, in different concentrations, synthesized by pulsed laser ablation in water. The effects of each surface modification were studied in detail using scanning electron microscopy, atomic force microscopy, Fourier transform infrared spectroscopy, energy dispersive X-ray spectroscopy, and contact angle measurements, while the antibacterial effect was tested. The results show a significant difference in surface properties between pure PET and modified PET surfaces, while the antibacterial tests demonstrate excellent activity against *E. coli* and *S. aureus*.

Collective states driven far away from the equilibrium

Damir Dominko¹, Vladimir Grigorev², Jure Demsar²

¹ *Institute of Physics, Bijenička cesta 46, Zagreb 10000, Croatia*

² *University of Mainz, Staundingerweg 7, 55128 Mainz, Germany*

email: ddominko@ifs.hr

We show how an intense laser pulse drives collective state far from the equilibrium and into a metastable nonthermal state or melts the order. While the optical pump-probe (P-p) studies show a suppression of the coherent (collective mode) response [1], studies done by three pulse techniques have revealed various phenomena, from a rapid order parameter recovery [2, 3] to transitions into new states [4,5].

Here, a three-pulse technique [2] was used to study two systems: $(\text{NbSe}_4)_3\text{I}$, undergoing pseudo Jahn Teller distortion, and $\text{K}_{0.3}\text{MoO}_3$, a well-studied prototype CDW system. Both systems show no coherent phonon response in the high symmetry state above the phase transition. We used the sequence of three pulses: a strong D-pulse followed by the weak P-p sequence [2] to record the real-time collective response as a function of time after the strong D-pulse (t_{12}). For excitation densities (D) comparable to complete quenching of the low-temperature phase, both systems show periodic modulations of strengths (amplitudes) and phases of collective modes as a function of t_{12} , see e.g. Fig. 1. What is particularly interesting is that the collective mode amplitudes can be substantially enhanced in the driven state compared to the near-equilibrium case. Moreover, their phases reach values that are not observed in the conventional P-p studies. While some of the observations can be accounted for in terms of existing theoretical models [3,5,6], some, e.g. the nonanalytical dependence of phase on t_{12} , seek for a new theoretical approach.

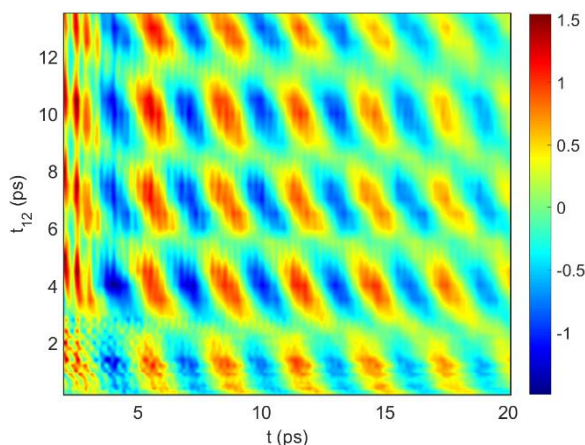


Fig. 1. The oscillatory part of the transients recorded at 5K on $(\text{NbSe}_4)_3\text{I}$, shown in false color coding as a function of time delay after the strong D-pulse, t_{12} . The time between the pump (P) and probe (p) is denoted by t . The fluence of D pulse was set to 2 mJ/cm^2 and the laser wavelength was 800 nm.

- [1] A. Tomelj et. al, Phys. Rev. Lett., 102 (2009) 066404
- [2] R. Yusupov et. al, Nat. Phys., 6 (2010) 681-684
- [3] P. Kusar et. al, Phys. Rev. B, 83 (2011) 035104
- [4] L. Stojchevska et al., Science 344 (2014) 6180
- [5] T. Huber et al., Phys. Rev. Lett., 113 (2014) 2
- [6] H. Schäfer et al., Phys. Rev. Lett., 105 (2010) 066402

P3

Characterization of low-pressure gaseous plasmas by optical emission spectroscopy

Slobodan Milošević¹, Miran Mozetič²

¹*Institute of Physics, Bijenička cesta 46, Zagreb 10000, Croatia*

²*Jozef Stefan Institute, Jamova cesta 39, Ljubljana 1000, Slovenia*

email: miran.mozetic@guest.arnes.si

Non-equilibrium plasma sustained in molecular gases in the pressure range of 1 – 100 Pa is useful for numerous applications, especially for tailoring the surface properties of heat-sensitive objects. Such plasmas are typically sustained by electrodeless discharges coupled to a radio-frequency generator. Optical emission spectroscopy is among the most frequently used techniques for plasma characterization because of its simplicity. Appropriate calibration with standard radiation sources is necessary for the scientifically spotless interpretation of the spectra. While the method is regarded as qualitative, the comparison with available codes for plasma simulation and/or the addition of a small quantity of actinometer provides sufficient insight into the plasma composition. The most extensive radiation of plasma particles (particularly atoms) appears in the vacuum ultraviolet range, so a combination of spectrometers with the detection range between about 100 and 1000 nm provides adequate results. Several examples will be presented, and the spectra will be interpreted in a semi-quantitative manner.

P4

Synthesis and properties of Ge-based core-shell quantum structures

Ivana Periša¹, Gabrijela Svalina¹, Krešimir Salamon¹, Jordi-Sancho Parramon¹, Sigrid Bernstorff², Maja Mičetić¹

¹ *Ruđer Bošković Institute, Bijenička cesta 54, Zagreb 10000, Croatia*

² *Sincrotrone Elettra Trieste, Italy*

email: maja.micetic@irb.hr

Quantum dots and nanoparticles with core/shell structure enables manipulation the materials optical and electrical properties in a broad range. Depending on the type, size and shape of both core and shell, we observe different consequences of quantum confinement effect in them.

Here we compare effects in materials comprising quantum dots consisting of Ge core and various types of shell (Si, Si₃N₄, Al and Mn) which are embedded in dielectric matrices. The materials are prepared by magnetron sputtering deposition in self-assembling growth mode. This mode enables formation of 3D regular lattices of the quantum dots. Such materials have exceptional, very tunable properties like enhanced absorption, quantum confinement, multiple exciton generation, very high temperature coefficient of resistance, etc. These properties are very usable in various photo-sensitive devices and sensors.

Femtosecond engraving computer-generated holograms

Mario Rakić¹, Vladimir Cviljušac², Antun Lovro Brkić¹, Hrvoje Skenderović¹

¹*Institute of Physics, Bijenička cesta 46, Zagreb 10000, Croatia*

²*University of Zagreb, Faculty of Graphic Arts, Getaldićeva 2, Zagreb 10000, Croatia*

email: mrakic@ifs.hr

Femtosecond laser micromachining is a technique used for the modification of various materials both on the surface and under the surface. In our laboratory, we have utilized this technique to modify different materials such as metals, ceramics, teeth, and polymers. Binary computer-generated holograms (CGH) can be written in transparent materials. While CGH computation is a well-researched field, challenges arise in their production and application due to high production costs and the need for specialized machinery. Holograms are mostly manufactured in the graphic industry, where they serve as security features in printed documents, among other uses.

We have successfully created holograms using a direct laser writing method with 120 fs pulses at 800 nm and a repetition rate of 1 kHz at the Institute of Physics in Zagreb, utilizing the Spectra-Physics Spitfire amplifier to generate femtosecond pulses from the Spectra-Physics Tsunami laser. We selected polycarbonate as our material of choice. The two-axis stage system from Micos was computer-controlled simultaneously with the laser. By tightly focusing the laser beam, an optical breakdown can occur within the bulk of the transparent material through multi-photon absorption. This absorption takes place in a confined space, resulting in permanent material modifications.

For a comparison I will also show reconstruction of the same CGH using other techniques: hologram generated with liquid crystal mask, Computer-to-Plate Process, Computer-to-Film Process and Monochrome Offset Printing.

Fabricating PET/ZnO composite assisted by RF plasma processing

Rafaela Radičić¹, Rok Zaplotnik², Lucija Krce³, Mario Ščetar⁴, Karolina Pietrzak¹, Dane Lojen², Miran Mozetič², Nikša Krstulović¹

¹ Centre for Advanced Laser Techniques, Institute of Physics, Bijenička Cesta 46, Zagreb 10000, Croatia

² Department of Surface Engineering, Institute Jožef Stefan, Jamova cesta 39, Ljubljana 1000, Slovenia

³ Department of Physics, Faculty of Science, Ruđera Bošković 33, Split 21000, Croatia

⁴ Faculty of Food Technology and Biotechnology, University of Zagreb, Pierottijeva 6, Zagreb 10000, Croatia

email: radicic@ifs.hr

Nanoparticles (NPs) can be incorporated into polymer matrices to significantly enhance their functional properties, including antimicrobial activity, barrier properties, biodegradability, and UV resistance [1, 2]. However, a major limitation of most low-cost polymers is their inherently poor surface characteristics. Cold plasma treatment has emerged as an effective technique to address this issue, improving surface energy, biocompatibility, morphology, wettability, and roughness, among other properties [3]. Radio frequency (RF) plasma generally produces a more uniform and stable plasma across the entire treatment area, making it particularly suitable for surface modifications.

In this study, ZnO NPs were incorporated into PET pretreated with oxygen RF plasma. The ZnO NP colloidal solution was synthesized using pulsed laser ablation in water at five different concentrations. The resulting PET/ZnO composite was characterized through various analytical techniques, including Fourier-transform infrared spectroscopy (FTIR), atomic force microscopy (AFM), contact angle goniometry, and X-ray photoelectron spectroscopy (XPS). A leaching test was also performed to evaluate the stability of nanoparticle incorporation within the polymer matrix. Furthermore, antimicrobial activity was assessed against *Escherichia coli*, and the gas transport properties of the composite material were investigated.

Acknowledgments:

This research was supported by the Croatian Science Foundation through the Outgoing Mobility of Assistants program (MOBDOK-2023).

[1] M. Irfan et al., Cellulose. 26 (2019) 8877–8894.

[2] T. Glaskova-Kuzmina et al., Polymers. 13 (2021) 3375.

[3] H. Turkoglu Sasmazel et al., Molecules. 26 (2021) 1665.

Silver nanoparticles in SiC matrix

Tihomir Car¹, Iva Šarić², Senad Isaković³, Sigrid Bernstorff⁴ and Maja Mičetić¹

¹ Ruđer Bošković Institute, Bijenička cesta 54, Zagreb 10000, Croatia

² University of Rijeka, Faculty of Physics, Radmile Matejčić 2, Rijeka 51000, Croatia

³ Faculty of Science, University of Sarajevo, 71000 Sarajevo, BiH

⁴ Elettra-Sincrotrone, Strada Statale 163.5 in AREA Science Park, 34149 Basovizza, Trieste, Italy

email: car@irb.hr

Silicon carbide (SiC) is a crystalline substance with a structure similar to diamond, with very high hardness, semiconducting properties, and high thermal and chemical resistance. SiC belongs to the group of wide bandgap semiconductors. Due to its properties, it has great potential for use in high-power, and high-radiation conditions under which conventional semiconductors cannot adequately perform. The properties of the material are significantly influenced by the metal atoms, or nanostructures, “inserted” into the basic matrix. In order to change the properties, silver nanoparticles were incorporated into the SiC matrix by simultaneous magnetron deposition. Depending on the deposition conditions, different structural, electrical and optical properties of the obtained samples were observed. The positive influence of silver nanoparticles on the observed properties was demonstrated.

P8

Technological applicability of VO₂ layers prepared with different approaches

Zs. Baji, L. Pósa, Gy. Molnár, J. Á. Vándorffy, P. Neumann, Z. Szabó, A. Sulyok, Z. Fogarassy, J. Volk

*HUN-REN Centre for Energy Research
1121 Konkoly Thege str. Budapest, Hungary*

email: fogarassy.zsolt@ek.hun-ren.hu

The present work aims to summarise our work on VO₂ layers, material preparation and applicability in microelectronics and micromechanics. VO₂ films were prepared with four methods: classical, dense thin films were deposited with vacuum evaporation, sputtering and ALD, and nanostructures with hydrothermal growth. All of these methods have advantages and disadvantages, and there are some technological difficulties that tend to always come up in the use of VO₂ materials which are hard but crucial to tackle. This paper is a summary of these with a special focus on practical issues.

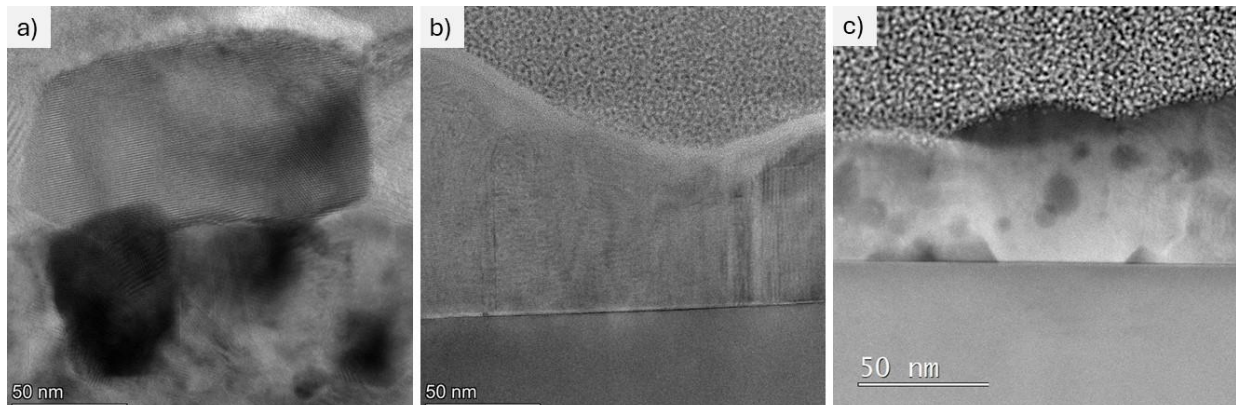


Fig.4. TEM images of different VO₂ layers: evaporated and post-annealed (a), sputtered (b) and ALD (c)

Acknowledgment

This research was funded by the Ministry of Innovation and Technology of Hungary from the National Research, Development and Innovation Fund, financed under the TKP2021 funding scheme, grant number TKP2021-NVA-03.

P9

Grazing incidence high-energy heavy ion irradiation for surface nanopatterning

K. Salamon¹, M. Mičetić¹, P. Dubček¹, Z. Siketić¹, S. Bernstorff², M. Karlušić¹

¹ Ruđer Bošković Institute, Bijenička 54, 10000, Zagreb, Croatia

² Elettra Sincrotrone Trieste, 31419 Basovizza, Italy

email: ksalamon@irb.hr

High-energy heavy ion irradiation is a time- and cost-effective technique for tailoring material properties such as production of nanomembranes or surface nanopatterning. In particular, irradiation at grazing incidence angle is known to produce long surface ion tracks along irradiation direction [1]. Depending on the applied ion fluence, coverage of surface with ion tracks can be tuned to desired level. For high enough fluences, complete coverage of surface can occur and uniform nanoscale patterns can emerge. In this contribution we present first results of our investigations where special emphasis has been placed on the ion energy and choice of the material.

[1] M. Karlušić et al., Nanopatterning surfaces by grazing swift heavy ion irradiation, Appl. Surf. Sci. 541 (2021) 148467.



P10

Pt nanoparticles on inert h-BN support: investigation of the CO₂ hydrogenation mechanism on the surface level

Tímea Hegedűs¹, Imre Szent^{1,2}, Anastasiia Efremova¹, Ákos Szamosvölgyi¹, János Kiss^{1,2}, Zoltán Kónya^{1,2}

¹ *Interdisciplinary Excellence Centre, Department of Applied and Environmental Chemistry, University of Szeged, Rerrich Béla tér 1, H-6720 Szeged, Hungary*

² *HUN-REN-SZTE Reaction Kinetics and Surface Chemistry Research Group, Rerrich Béla tér 1, H-6720 Szeged, Hungary*

email: timeahegedus7@gmail.com

One of the goals of catalysis research is to design catalysts that can eliminate unwanted by-products and achieve 100% selectivity for the target product without loss of activity. A detailed understanding of the role of the components that build up the catalyst is essential for its proper design. This is easy for oxides, but for pure metals, especially precious metals, determining their intrinsic activity under ambient conditions is much more complex as the catalyst supports used so far always play a role in the catalytic reaction directly or indirectly. Even SiO₂, regarded as inert shows some activity owing to the hydroxyl groups on its surface. In this work, we propose chemically inert and defect-free h-BN fibers with wide band gap and robust covalent bonds as an uncommon reference catalyst support in the CO₂ hydrogenation¹. They were synthesized via a co-precipitation method and applied as support for size-controlled (4,7±0.6 nm) Pt nanoparticles. The catalytic activity of pure h-BN and Pt/h-BN was tested in the CO₂ hydrogenation reaction. The fibers alone show no catalytic activity; however, Pt/h-BN exhibited low but notable activity (377 nmol/g_s at 400°C) with almost 100% CO selectivity. XPS, TEM, and DRIFTS measurements indicate that h-BN has no effect on the metal particles or the reaction. The observed catalytic activity is attributed to Pt nanoparticles alone. CO vibration spectroscopy studies suggest that due to the lack of substrate-metal interaction Pt nanoparticles adopt an ideal spherical structure, resulting in several low coordination sites capable of CO₂ conversion². Thus, h-BN fibers can serve as reference material in catalytic investigations with the proposed metal and reaction or under different conditions.

¹ A. Efremova et al., Applied Surface Science, 571, January 2022 151326.

² C. Lentz et al., Journal of Molecular Catalysis A: Chemical, 426, January 2017, 1-9.

P11

In situ TEM examination of the monoclinic VO₂ thin layer phase transformation to tetragonal VO₂

I Cora¹, Zs Baji¹, Zs E Horváth¹, Z Szabó¹, J Volk¹, Zs Fogarassy¹

¹HUN-REN Centre for Energy Research, Institute of Technical Physics and Materials Science, Budapest 1121, Hungary

email: cora.ildiko@ek.hun-ren.hu

Vanadium oxide is of wide interest, thanks to the fact that it can be used in sensors, semiconductors, critical temperature sensors among others. Examining the phase diagram of vanadium oxide, we can see quite a lot of different vanadium oxide structures. In special cases phase transformations of the semiconducting V₂O₃, V₃O₅ or VO₂ phases occur into a metallically conductive polymorph of vanadium oxide phase. The monoclinic, semiconducting VO₂ phase is reversibly transformed into the tetragonal, metallically conducting VO₂ phase at a relatively low temperature of around 68°C [1].

In this work, the *in situ* phase transformation of the monoclinic (P2₁/c) VO₂ to tetragonal (rutile-type, P4₂/mnm) VO₂ was investigated by transmission electron microscopy (TEM). The primary objective of the project was the production of monoclinic VO₂ layers, which can be intended use in application-oriented sensors in the future [2]. Even the initial layer deposition experiments were successful, since based on the electrical measurements, the deposited vanadium oxide layers became conductive at around 68°C, from which it could be concluded that a monoclinic VO₂ layer was successfully formed, which can reversibly transform into a tetragonal VO₂ phase above 68°C.

During the TEM examination, from the electron beam, the sample can locally easily exceed the temperature required for the phase transformation, so the monoclinic → tetragonal VO₂ phase transformation can be observed even without extra heating during the TEM examination. However, the investigation is complicated since most of the peaks of the monoclinic (P2₁/c) and tetragonal (P4₂/mnm) structures of VO₂ are overlapping, only a few of them are indicator. Therefore, the layers were deposited to amorphous substrate by atomic layer deposition (ALD) in order to have random orientation of the ca. 50-100 nm large grains, so we probably have the proper orientation in plan view thinned sample.

Acknowledgment

This research was funded by the Ministry of Innovation and Technology of Hungary from the National Research, Development and Innovation Fund, financed under the TKP2021 funding scheme, grant number TKP2021-NVA-03.

[1] M J Tadjer, V D Wheeler, B P Downey, Z R Robinson, D J Meyer, C R Eddy Jr., F J Kub, Solid-State Electronics 136, 2017, 30-35

[2] Zs Baji, L Pósa, Gy Molnár, Z Szabó, M Volom, A K Surca, G Drazic, J Volk, Materials Science in Semiconductor Processing 162, 2023, 107483

P12

Python Modeling of Beamline Vacuum System

Dimo Yosifov, Nagma Mathur

*TRIUMF, Canada's Particle accelerator center
4004 Wesbrook Mall, Vancouver, Canada*

email: dyosifov@triumf.ca

This paper presents a Python-based model for analyzing and optimizing vacuum systems in linear beamlines. The model processes input data from CSV files containing beamline geometry, material properties, pumping parameters, and outgassing rates. Using Python's math and numpy libraries, the model calculates pressure distribution along the beamline and identifies areas of high gas load. It provides insights into the impact of different materials, pumping speeds, and pump locations on the system's performance. While the model offers valuable estimates, actual results should be verified experimentally.

P13

The effect of impurities on the structure and mechanical properties of CoCrCuFeNi alloy films

Hajagos-Nagy, Klára; Radnóczy, György Zoltán; Radnóczy György

HUN-REN Centre for Energy Research, Konkoly-Thege Miklós út 29-33., Budapest 1121, Hungary

email: nagy.klara@ek.hun-ren.hu

High-entropy alloy (HEA) films are often used as protective coatings; therefore their mechanical and anticorrosion properties are of main interest. Mechanical properties of films are fundamentally determined by their structure and morphology. Impurities, especially oxygen can inhibit structure evolution in vapour deposited films. Consequently, mapping their effect on film growth and structure is of outmost importance.

CoCrCuFeNi films were deposited by DC magnetron sputtering on thermally oxidized Si wafers. We used different types of ultra-high vacuum and high vacuum deposition conditions by introducing oxygen before sputtering. The initial background pressure was 5×10^{-8} mbar and we increased it in steps of one order of magnitude up to 5×10^{-5} mbar.

All films exhibit the same structure and morphology. The films have V-shaped grains which are the characteristic of competitive growth. Grains with $\langle 111 \rangle$ orientation grew faster at the disadvantage of grains with other orientation. Electron diffraction patterns showed that all films have fcc metallic HEA phase and there is no sign of an oxide phase. We presume that oxygen atoms were not able to segregate on the growing crystal faces and could not form covering layers, inhibiting grain growth. In accordance with structural investigation, nanoindentation measurements showed that all films have the same elastic modulus (~ 200 GPa) and hardness (~ 7.5 GPa).

We will show how the structure varies on a combinatorial sample where the partial pressure of oxygen is further increased during deposition. We aim to find the oxygen partial pressure where an impurity phase forms that hinders grain growth and disrupts the columnar structure.

This work is supported by the project VEKOP-2.3.3-15-2016-00002 of the European Structural and Investment Funds and the Hungarian Academy of Sciences, grant number K143216.

P14

Direct growth and application of 2D single crystals of Mxenes

Pranjali Jadhao¹, Stanislav Voborný^{1,2}, Tomáš Šikola^{1,2}

¹ CEITEC BUT, Brno University of Technology, Purkyňova 123, Brno 612 00, Czech Republic

² Institute of Physical Engineering, Brno University of Technology, Technická 2, Brno 616 00, Czech Republic

email: pranjali@vutbr.cz

This work represents a comprehensive exploration of Mo₂C MXene synthesis. We employed an advanced setup, specifically Ultra-High Vacuum Chemical Vapor Deposition (UHV-CVD) and Ultra-High Vacuum Scanning Electron Microscopy (UHV-SEM), for the direct growth of two-dimensional (2D) single crystal MXenes. Our primary objective was to gain insight into the surface properties of Mo₂C. We utilized analytical techniques such as Scanning Electron Microscopy (SEM), and Energy-Dispersive X-ray Spectroscopy (EDS), Nano-SAM (scanning Auger Microscopy). Our observations revealed that, at elevated temperatures, copper (Cu) droplets coexisted with needle-like molybdenum (Mo) structures. However, a detailed understanding of such dynamics is still missing.

Therefore, the integration of Molecular Beam Epitaxy (MBE) apparatus with a Mo electron beam cell, direct epitaxial growth of Mo₂C MXenes can be studied. Incorporating the vertical UHV e-beam evaporator enhances the method performance and provides better control over MXenes synthesis, offering new possibilities and insights for future applications.

Keywords: Chemical vapor deposition, Molecular beam epitaxy, Mo₂C, SEM-EDS, Nano-SAM (scanning Auger Microscopy).



P15

Enhanced Photocatalytic Activity of ZnO Films with Fe₂O₃ Intermediate Layers for Efficient Water Purification

Ivna Kavre Piltaver^{1,2}, Robert Peter^{1,2}, Ivan Prološčić¹, Iva Šarić Janković^{1,2}, Slavko Kralj^{3,4,5}

¹ University of Rijeka, Faculty of Physic, Radmile Matejčić 2, 51000 Rijeka, Croatia

² University of Rijeka, Center for Micro- and Nanosciences and Technologies, Radmile Matejčić 2, 51000 Rijeka, Croatia

³ Department for Material Synthesis K8, Jožef Stefan Institute, Jamova 39, 1000 Ljubljana, Slovenia

⁴ Nanos SCI, Nanos Scientifical Ltd. Teslova ulica 30, 1000 Ljubljana, Slovenia

⁵ University of Ljubljana, Faculty of Pharmacy, Department of Pharmaceutical Technology, Aškerčeva cesta 7, 1000 Ljubljana, Slovenia

email: ivna.kavre@uniri.hr

Zinc oxide (ZnO) is a wide bandgap semiconductor with diverse applications, including photocatalysis. In the last two decades, atomic layer deposition (ALD) emerged as an excellent technique for synthesizing ZnO thin films, offering precise control of film thickness, high conformality and reproducible growth of defect-free films. ZnO films grown on flat solid substrates or nanoparticles have shown potential for water purification systems, due to their excellent photocatalytic properties. Powders or colloidal suspensions of nanoparticles are particularly efficient due to their high surface-to-volume ratio, which increases the number of available surface states serving as reaction sites for photocatalytic processes. However, separating the nanoparticles from the solution is challenging and expensive. Therefore, optimizing the design of highly efficient photocatalytic materials for water purification to achieve practical benefits is essential, as both a large surface area and high optical efficiency are crucial for the high photocatalytic activity of metal oxide films. This study investigated the growth of thin ZnO ALD films on glass substrates coated with an intermediate layer of nano- or microparticles of various sizes and shapes. Up to five different samples of Fe₂O₃ particles were used as an intermediate layer between ZnO film and glass substrate, producing a multifunctional material with a high surface area. To understand the photodegradation mechanism, detailed information on the morphology of the nanostructured ZnO surface and surface chemistry was obtained using scanning electron microscopy, secondary ion mass spectrometry, and X-ray photoelectron spectroscopy. Photocatalytic activity of samples was evaluated by monitoring the degradation of methylene blue in of aqueous solution under UV and solar light irradiation. The best Fe₂O₃-ZnO sample exhibited a photodegradation reaction rate approximately 60% higher than that of the reference ZnO film on glass substrate. These results demonstrate that ZnO with an intermediate layer made of Fe₂O₃ microparticles can be effectively applied for environmental applications.



P16

Influence of chitosan-coated urinary catheters on adhesion of urethral cells

Alenka Vesel¹, Nina Recek¹, Miran Mozetic¹, Helena Motaln²

¹ *Jozef Stefan Institute, Department of Surface Engineering, Jamova cesta 39, 1000 Ljubljana, Slovenia*

² *Jozef Stefan Institute, Department of Biotechnology, Jamova cesta 39, 1000 Ljubljana, Slovenia*

email: alenka.vesel@ijs.si

Urinary catheters are often a source of hospital-related infections of patients. One possible solution to prevent such infections is the application of antibacterial coatings such as chitosan, which has promising antibacterial properties. However, there is a problem with the adhesion of chitosan to the surface of a catheter. Catheters are made of a long, flexible polymer tube, which is usually made of polyvinyl chloride (PVC). PVC is a hydrophobic polymer. Therefore, chitosan solution cannot completely wet the surface and adhere to it. One method that can be used to improve the wettability of polymer is plasma treatment. In this contribution, we present the influence of plasma treatment on chitosan adhesion and cell proliferation. Four different plasma treatment methods were used: solely O₂ or CO₂ plasma treatment, or a combination of H₂ plasma pretreatment followed by O₂ and CO₂ plasma treatment. In all four treatment methods, the wettability was increased by the incorporation of oxygen functional groups. However, when using O₂ or CO₂ plasma treatment with H₂ pretreatment, a superhydrophilic surface was obtained. In addition, H₂ pretreatment reduced the chlorine concentration in the PVC surface layer. Nevertheless, despite the different wettabilities of plasma-treated surfaces, all treatments enabled the adhesion of chitosan. More specifically, there were no differences when comparing O₂ and CO₂ treatment, but additional H₂ pretreatment seems to cause a slightly higher amount of adhered chitosan on the surface as shown by measuring the nitrogen concentration from chitosan. Also, no differences were found when comparing different incubation times of chitosan, i.e., 30 min, 1 h, and 3 h. The chitosan-coated PVC surfaces were then incubated with urethral cells to investigate the cytotoxicity of the chitosan. Cell adhesion and proliferation correlated well with the adhered chitosan, i.e., better cell proliferation was observed when H₂ pretreatment was used.

New stable ionization vacuum gauge as the transfer standard

Janez Šetina¹, Martin Vičar², Dominik Pražák², Jiří Tesař², Tomáš Gronych³

¹ *Institute of Metals and Technology, Lepi pot 11, Ljubljana, SI-1000, Slovenia*

² *Czech Metrology Institute, Okružní 31, Brno, CZ-638 00, Czechia*

³ *Charles University in Prague, Faculty of Mathematics and Physics, V Holešovičkách 2, Prague, CZ-180 00, Czechia*

email: mvicar@cmi.cz

Dynamically generated pressure systems are often used as primary ultra high vacuum standards. To demonstrate the equivalence of the primary standards, it is necessary to compare them. The Slovenian IMT laboratory and the Czech CMI laboratory are preparing a bilateral comparison registered as Euramet project 1416 in the range from $5 \cdot 10^{-7}$ Pa to $9 \cdot 10^{-4}$ Pa.

A suitable transfer standard with the best possible stability is necessary for the comparison. The paper describes the design of the prepared transfer standard, which includes, in addition to an ionization extractor type vacuum gauge and a spinning rotor gauge, a new stable ionization vacuum gauge with previously proven excellent sensitivity stability.

This new gauge described in detail in ISO/TS 6737:2023 will be powered and evaluated by a special new IRC081 unit manufactured by Inficon. The measurement method and comparison evaluation principle are also described.

P18**GaON thin films prepared by reactive sputtering of a liquid Ga target**Marcell Gajdics¹, Miklós Serényi¹, György Sáfrán¹, Béla Pécz¹¹*Institute of Technical Physics and Materials Science, HUN-REN Centre for Energy Research, Hungary*email: gajdics.marcell@ek.hun-ren.hu

Wide bandgap Ga-based semiconductors, such as GaN and Ga₂O₃ are receiving increasing interest in the field of power electronics and optoelectronics. However, there is quite large difference between their bandgaps. The bandgap of GaON is expected to be between them, thus it is worthwhile to explore optical properties of this material.

In our work, we investigated the possibilities of depositing GaON thin films by reactive sputtering. For the deposition, a liquid Ga target was used and the flow rate of the reactive gases (O₂ and N₂) was varied. A combinatorial sample preparation approach was used to deposit a range of compositions in one sample. The pressure of the sputtering gas was 2 Pa and the sputtering power was fixed during all the deposition experiments. The elemental composition of the films was determined by energy dispersive spectroscopy. Optical properties (e.g. refractive index) were studied by spectroscopic ellipsometry and the optical bandgap of the samples deposited on quartz substrate was determined from transmission intensity measurements. The microstructure of the films was studied by transmission electron microscopy. Dependence of the refractive index and layer thickness on the applied reactive gas flow was explored. Furthermore, it was found that the bandgap energy can be altered by controlling the oxygen concentration of the film (through controlling the oxygen flow rate during deposition).